


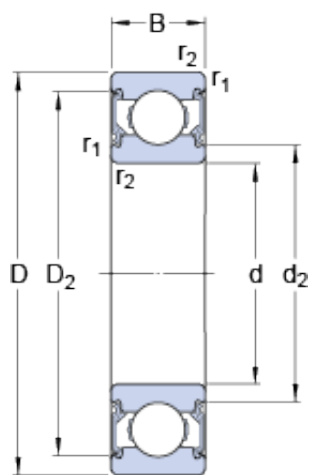

Bearing No. 6005-2RSH

D	47 mm
d	25 mm
B	12 mm
Noun	Bearing
Bore	0.984 Inch 25 Millimeter
UNSPSC	31171504
series:	60
Category	Single Row Ball Bearing
Size (mm)	47x25x12
Snap Ring	No
Enclosure	2 Seals
Inventory	0.0
Width (mm)	12
bore type:	Round
Weight / LBS	0.184
Mass bearing	0.081 kg
maximum rpm:	9500 RPM
Inch - Metric	Metric
Product Group	B00308
Cage Material	Steel
D ₂	42.2 mm
closure type:	Double Sealed
d ₂	29.45 mm
Keyword String	Ball
overall width:	12 mm
cage material:	Steel
Other Features	Deep Groove NBR Seal
fillet radius:	0.6 mm

Enclosure Type	Contact Seal
bore diameter:	25 mm
Bearing number	6005-2RSH
Limiting speed	9500 r/min
Rolling Element	Ball Bearing
finish/coating:	Uncoated
Precision Class	ABEC 1 ISO P0
Inner Race Width	0 Inch 0 Millimeter
Outer Race Width	0.472 Inch 12 Millimeter
Outside Diameter	1.85 Inch 47 Millimeter
Manufacturer URL	http://www.skf.com
Long Description	25MM Bore; 47MM Outside Diameter; 12MM Outer Race Width; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage;
Manufacturer Name	SKF
precision rating:	Not Rated
Weight / Kilogram	0.086
outer ring width:	12 mm
outside diameter:	47 mm
D _a max.	43.8 mm
d _a max.	29.5 mm
d _a min.	28.2 mm
Internal Clearance	C0-Medium
Bore Diameter (mm)	47
r _a max.	0.6 mm
Outer Diameter (mm)	25
internal clearance:	C0

$r_{1,2}$ min.	0.6 mm
d_a - min.	28.2 mm
d_a - max.	29.5 mm
D_a - max.	43.8 mm
r_a - max.	0.6 mm
Minimum Buy Quantity	N/A
d_2 ?	29.45 mm
D_2 ?	42.2 mm
static load capacity:	6.55 kN
row type & fill slot:	Single Row Non-Fill Slot
$r_{1,2}$ - min.	0.6 mm
dynamic load capacity:	11.9 kN
Harmonized Tariff Code	8482.10.50.68
Manufacturer Item Number	6005-2RSH
Internal Special Features	No
Basic dynamic load rating C	11.9 kN
operating temperature range:	-40 to +210 °F
Basic dynamic load rating - C	11.9 kN
Maximum Capacity / Filling Slot	No
Fatigue load limit P_u	0.275 kN
Calculation factor k_r	0.025
Calculation factor f_0	14
Fatigue load limit - P_u	0.275 kN
Calculation factor - k_r	0.025
Calculation factor - f_0	14
Basic static load rating C_0	6.55 kN
Basic static load rating -	6.6 kN

C ₀	
----------------	--