


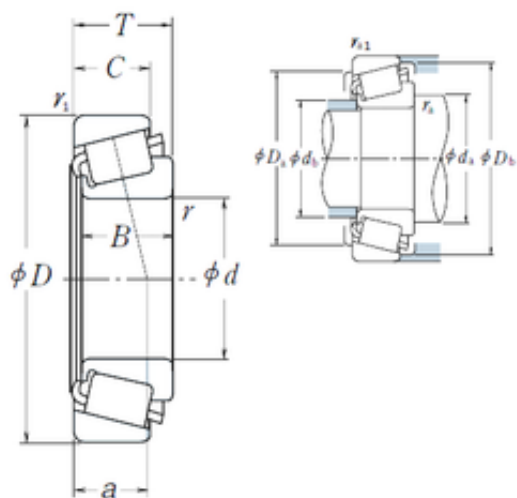

Bearing No. JL69349/JL69310

e	0.42
D	63 mm
C	13,5 mm
B	17 mm
T	17 mm
a	14,6 mm
d	38 mm
da	49 mm
D_	63
B_	17
Y1	1.4
Db	60 mm
db	42,5 mm
Da	56 mm
Z_	22
C0	52
C_	13.5
Y0	0.79
D_a	56
D_b	60
SLR	11.5
RAr	109.82
DE_	55.651
DI_	44.764
CUP	0.071
DA_	5.611
DA1	6.069
DA2	5.435
SDM_	50.286
CONE	0.132

KBRG	3141
yobi	JL69349/JL69310
ALP22	0
BETA_	1
BET23	0
BET22	10
BET21	3
ALP21	31
ALP23	0
LangID	1
ALPHA_	15.5
Weight	0,203 Kg
Oil rpm	7500
hidYobi	JL69349/JL69310
inner r	SPEC
ra max.	3,5 mm
outer r	1.3
GRS rpm	5600
r1 min.	1,3 mm
hidTable	ecat_NSTPRI
inner ra	3.5
outer rb	1.3
ra1 max.	1,3 mm
Size (mm)	38x63x17
SHOG_yobi	JL69349/JL69310
Prod_Type3	TRBSR_ID_A
Width (mm)	17
Bearing number	JL69349/JL69310
Bore Diameter (mm)	38
Outer Diameter (mm)	63
Calculation factor (e)	0,42
Calculation factor (Y0)	0,79

(Oil) Lubrication Speed	7500 r/min
(Grease) Lubrication Speed	5600 r/min
Basic dynamic load rating (C)	38,5 kN
Basic static load rating (C0)	52 kN