


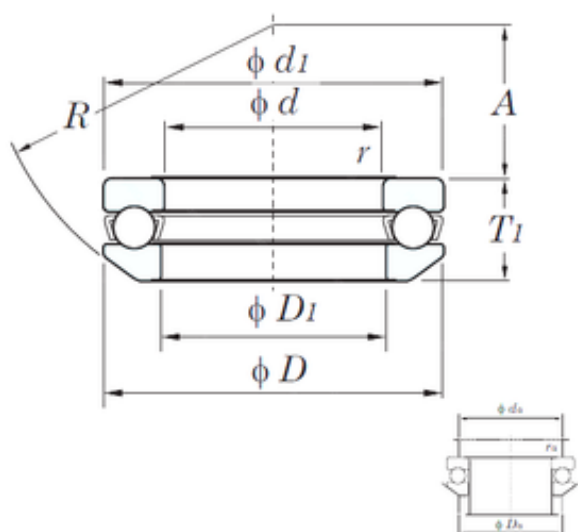

Bearing No. 53272

|             |               |
|-------------|---------------|
| T           | 116.7         |
| d           | 360 mm        |
| D           | 500 mm        |
| C           | -             |
| A           | 172 mm        |
| R           | 360 mm        |
| Ca          | 876           |
| Cu          | 76.1          |
| T1          | 116,7 mm      |
| d1          | 495 mm        |
| D1          | 365 mm        |
| Coa         | 3500          |
| Weight      | 65 Kg         |
| r(min)      | 4             |
| r min.      | 4 mm          |
| d1(max)     | 495           |
| D1(min)     | 365           |
| D2(min)     | -             |
| ra max.     | 3 mm          |
| da(min)     | 443           |
| D3(min)     | -             |
| Da max.     | 417 mm        |
| da min.     | 443 mm        |
| Da(max)     | 417           |
| ra(max)     | 3             |
| Oil lub.    | 500           |
| Size (mm)   | 360x500x116.7 |
| Width (mm)  | 116,7         |
| Bearing No. | 53272         |
| Grease lub. | 340           |
|             |               |

|                               |           |
|-------------------------------|-----------|
| Bearing number                | 53272     |
| (Refer.)Mass(kg)              | 65.0      |
| Bore Diameter (mm)            | 360       |
| Outer Diameter (mm)           | 500       |
| (Grease) Lubrication Speed    | 340 r/min |
| Basic dynamic load rating (C) | 701 kN    |
| Basic static load rating (C0) | 3500 kN   |