


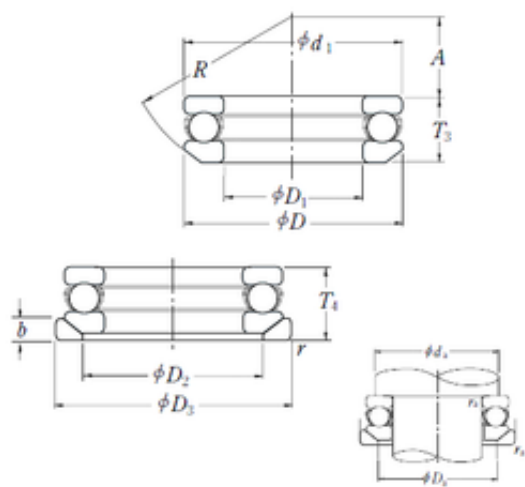

Bearing No. 53272XU

C	705
D	500 mm
R	360 mm
A	172 mm
T	130 mm
b	43 mm
d	360 mm
r	4
A_	172
D_	500
Z_	22
da	442
T3	116.7
C0	3500
T4	130
ra	3
B_	130
R_	360
D2	430 mm
D3	510 mm
D1	365 mm
d1	495 mm
D_2	430
D_3	510
SRE	27.4
D_1	365
SRI	27.4
DA_	50.8
D_a	418
SREX	0.21

SRIN	0
SREN	0
mass	90.9
yobi	53272XU
SDM_	430
SRIX	0.21
KBRG	513
r min.	4 mm
LangID	1
Weight	90,9 Kg
ra max.	3 mm
GRS rpm	380
Oil rpm	560
da min.	442 mm
Da max.	418 mm
hidYobi	53272XU
hidTable	ecat_NSSDTB
Size (mm)	360x500x130
Prod_Type3	TB_SD_WASW
Width (mm)	130
Bearing number	53272XU
Bore Diameter (mm)	360
Outer Diameter (mm)	500
(Grease) Lubrication Speed	380 r/min
Basic static load rating (C0)	3500 kN
Basic dynamic load rating (C)	705 kN