


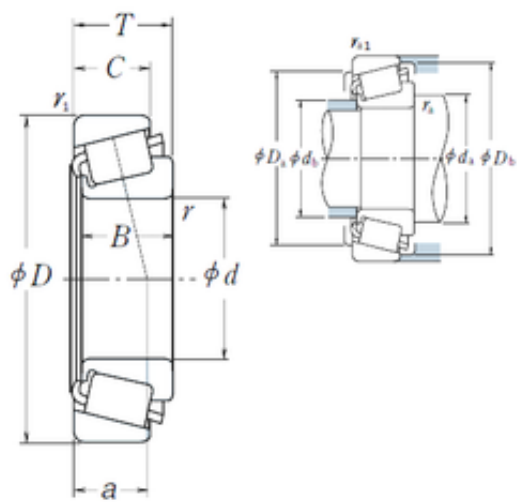

Bearing No. JHM840449/JHM840410

e	0.52
d	200 mm
D	300 mm
T	65 mm
B	62 mm
C	51 mm
a	73,1 mm
Da	273 mm
B_	62
Db	289 mm
da	223 mm
Y0	0.63
db	215 mm
C0	1130
D_	300
Z_	27
C_	51
Y1	1.2
DE_	270.744
SLR	49.5
D_a	273
DI_	226.249
DA1	24.863
DA2	22.066
CUP	5.19
DA_	23.47
D_b	289
RAr	438.4
SDM_	248.889
KBRG	3141

yobi	JHM840449/JHM840410
CONE	10.3
ALP21	38
ALP22	16
ALP23	0
BETA_	1
BET21	3
BET23	0
BET22	15
r min.	3,5 mm
LangID	1
Weight	15,49 Kg
ALPHA_	19.133
r1 min.	2,5 mm
ra max.	3,5 mm
Oil rpm	1400
outer r	2.5
hidYobi	JHM840449/JHM840410
GRS rpm	1000
inner r	3.5
hidTable	ecat_NSTPRI
inner ra	3.5
outer rb	2.5
ra1 max.	2,5 mm
Size (mm)	200x300x65
SHOG_yobi	JHM840449R/410R
Prod_Type3	TRBSR_ID_A
Width (mm)	65
Bearing number	JHM840449/JHM840410
Bore Diameter (mm)	200

Outer Diameter (mm)	300
Calculation factor (e)	0,52
(Oil) Lubrication Speed	1400 r/min
Calculation factor (Y0)	0,63
(Grease) Lubrication Speed	1000 r/min
Basic static load rating (C0)	1130 kN
Basic dynamic load rating (C)	615 kN