


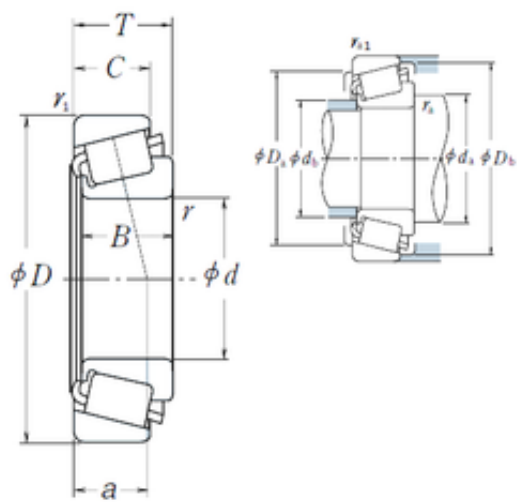

Bearing No. JHM516849/JHM516810

e	0.41
d	85 mm
D	140 mm
T	39 mm
B	38 mm
C	31,5 mm
a	33,3 mm
Da	125 mm
B_	38
Db	134 mm
da	100 mm
Y0	0.81
db	94 mm
C0	305
D_	140
Z_	21
C_	31.5
Y1	1.5
DE_	124.852
SLR	30
D_a	125
DI_	98.757
DA1	14.402
DA2	12.706
CUP	0.767
DA_	13.557
D_b	134
RAr	253.94
SDM_	112.032
KBRG	3141

yobi	JHM516849/JHM516810
CONE	1.55
ALP21	30
ALP22	22
ALP23	0
BETA_	1
BET21	3
BET23	0
BET22	15
r min.	3 mm
LangID	1
Weight	2,318 Kg
ALPHA_	15.183
r1 min.	2,5 mm
ra max.	3 mm
Oil rpm	3400
outer r	2.5
hidYobi	JHM516849/JHM516810
GRS rpm	2400
inner r	3
hidTable	ecat_NSTPRI
inner ra	3
outer rb	2.5
ra1 max.	2,5 mm
Size (mm)	85x140x39
SHOG_yobi	JHM516849R/810R
Prod_Type3	TRBSR_ID_A
Width (mm)	39
Bearing number	JHM516849/JHM516810
Bore Diameter (mm)	85

Outer Diameter (mm)	140
Calculation factor (e)	0,41
(Oil) Lubrication Speed	3400 r/min
Calculation factor (Y0)	0,81
(Grease) Lubrication Speed	2400 r/min
Basic static load rating (C0)	305 kN
Basic dynamic load rating (C)	202 kN