


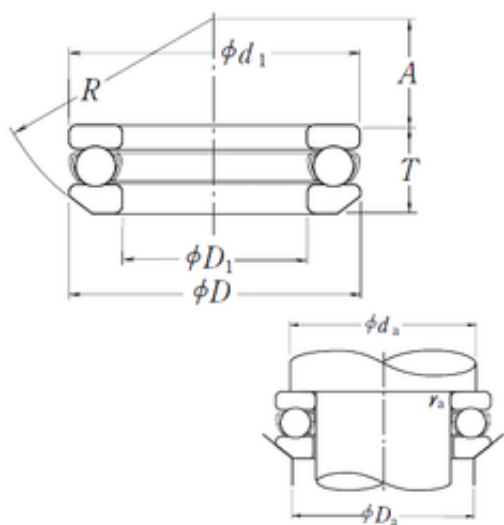

Bearing No. 53305

R	45 mm
C	36
r	1
d	25 mm
D	52 mm
T	19,8 mm
A	21 mm
R_	45
B_	19.8
ra	1
C0	61.5
da	41
Z_	11
A_	21
T3	19.8
d1	52 mm
D_	52
D1	27 mm
D_1	27
DA_	9.525
SRI	5.15
SRE	5.15
D_a	36
SREN	0
SRIN	0
yobi	53305
SRIX	0.04
mass	0.182
SDM_	38.5
KBRG	5121

SREX	0.04
Noun	Bearing
Bore 2	1.063 Inch 27 Millimeter
Bore 1	0.984 Inch 25 Millimeter
Banded	No
UNSPSC	31171552
r min.	1 mm
LangID	1
Height	0.78 Inch 19.8 Millimeter
Weight	0,182 Kg
GRS rpm	3200
hidYobi	53305
Oil rpm	5000
ra max.	1 mm
Da max.	36 mm
da min.	41 mm
Category	Thrust Ball Bearings
hidTable	ecat_NSSDTB
Size (mm)	25x52x19.8
Inventory	0.0
Prod_Type3	TB_SD_WAS
Width (mm)	19,8
Weight / LBS	0.40124
Product Group	B00308
Cage Material	Steel
Inch - Metric	Metric
Bearing number	53305
Other Features	Single Row With Aligning Seat
Thrust Bearing	Yes

Keyword String	Ball Thrust
Rolling Element	Ball Bearing
Precision Class	Non-Precision
Manufacturer URL	http://www.nskamericas.com
Long Description	25MM Bore 1; 27MM Bore 2; 52MM Outside Diameter; 19.8MM Height; Ball Bearing; Single Direction; Not Banded; Steel Cage; Non-Precision
Outside Diameter	2.047 Inch 52 Millimeter
Weight / Kilogram	0.19
Manufacturer Name	NSK
Bore Diameter (mm)	25
Outer Diameter (mm)	52
Minimum Buy Quantity	N/A
Component Description	Roller Assembly Plus Raceways
Harmonized Tariff Code	8482.10.50.08
(Grease) Lubrication Speed	3200 r/min
Single or Double Direction	Single Direction
Basic static load rating (C0)	61,5 kN
Basic dynamic load rating (C)	36 kN
Overall Height with Aligning Washer	0 Inch 0 Millimeter