


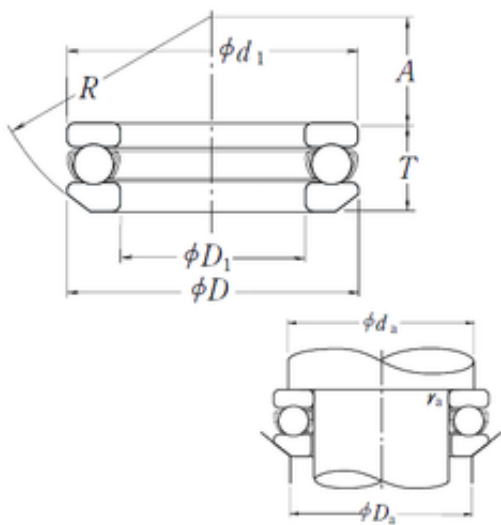

Bearing No. 53306

r	1
C	43
d	30 mm
D	60 mm
T	22,6 mm
A	22 mm
R	50 mm
R_	50
Z_	12
D_	60
B_	22.6
ra	1
C0	78.5
da	48
D1	32 mm
T3	22.6
A_	22
d1	60 mm
SRE	5.6
DA_	10.319
SRI	5.6
D_1	32
D_a	42
KBRG	5121
SREX	0.05
SDM_	45
yobi	53306
mass	0.28
SRIX	0.05
SRIN	0

SREN	0
Noun	Bearing
LangID	1
Bore 1	1.181 Inch 30 Millimeter
Bore 2	1.26 Inch 32 Millimeter
Height	0.906 Inch 23 Millimeter
UNSPSC	31171552
r min.	1 mm
Weight	0,28 Kg
Banded	No
series:	52300
da min.	48 mm
Da max.	42 mm
ra max.	1 mm
GRS rpm	2800
Oil rpm	4300
hidYobi	53306
hidTable	ecat_NSSDTB
Category	Thrust Ball Bearings
Inventory	0.0
Size (mm)	30x60x22.6
Width (mm)	22,6
Prod_Type3	TB_SD_WAS
race type:	Flat
Weight / LBS	0.61729
maximum rpm:	4300 rpm
Cage Material	Steel
Inch - Metric	Metric
Product Group	B00308
Keyword String	Ball Thrust
bore diameter:	30 mm

Thrust Bearing	Yes
Other Features	Single Row With Aligning Seat
Bearing number	53306
overall width:	25 mm
cage material:	Steel Cage
fillet radius:	1 mm
Rolling Element	Ball Bearing
Precision Class	Non-Precision
Manufacturer URL	http://www.nskamericas.com
Outside Diameter	2.362 Inch 60 Millimeter
Long Description	30MM Bore 1; 32MM Bore 2; 60MM Outside Diameter; 23MM Height; Ball Bearing; Single Direction; Not Banded; Steel Cage; Non-Precision
precision rating:	ABEC1, P0
Weight / Kilogram	0.32
Manufacturer Name	NSK
outside diameter:	60 mm
Bore Diameter (mm)	30
Outer Diameter (mm)	60
separable or banded:	Separable
Minimum Buy Quantity	N/A
thrust bearing type:	Single-Direction
Component Description	Roller Assembly Plus Raceways
static load capacity:	17700 lbf
dynamic load capacity:	9700 lbf
Harmonized Tariff Code	8482.10.50.08
outside diameter design:	Straight

Manufacturer Item Number	53306
(Grease) Lubrication Speed	2800 r/min
Single or Double Direction	Single Direction
operating temperature range:	Maximum of +120 °C
Basic dynamic load rating (C)	43 kN
Basic static load rating (C0)	78,5 kN
Overall Height with Aligning Washer	0 Inch 0 Millimeter