


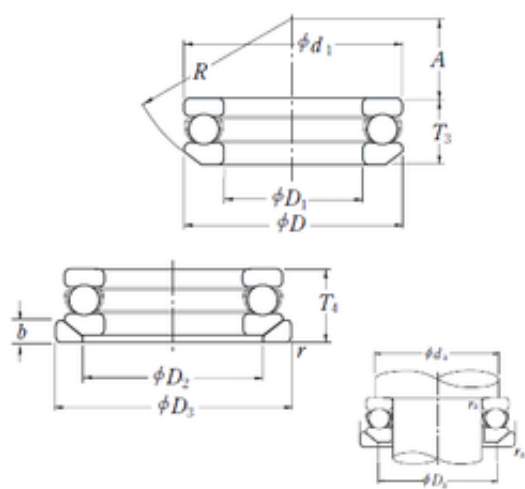

Bearing No. 53306U

C	43
D	60 mm
R	50 mm
A	22 mm
T	25 mm
b	7 mm
d	30 mm
r	1
A_	22
D_	60
Z_	12
da	48
T3	22.6
C0	78.5
T4	25
ra	1
B_	25
R_	50
D2	45 mm
D3	62 mm
D1	32 mm
d1	60 mm
D_2	45
D_3	62
SRE	5.6
D_1	32
SRI	5.6
DA_	10.319
D_a	42
SREX	0.05

SRIN	0
SREN	0
mass	0.336
yobi	53306U
SDM_	45
SRIX	0.05
KBRG	5131
r min.	1 mm
LangID	1
Weight	0,336 Kg
ra max.	1 mm
GRS rpm	2800
Oil rpm	4300
da min.	48 mm
Da max.	42 mm
hidYobi	53306U
hidTable	ecat_NSSDTB
Size (mm)	30x60x25
Prod_Type3	TB_SD_WASW
Width (mm)	25
Bearing number	53306U
Bore Diameter (mm)	30
Outer Diameter (mm)	60
(Grease) Lubrication Speed	2800 r/min
Basic static load rating (C0)	78,5 kN
Basic dynamic load rating (C)	43 kN