


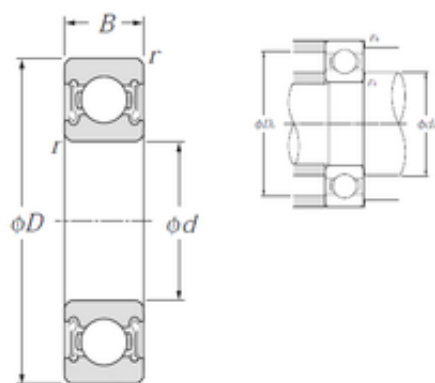

Bearing No. 6005LLB

C	12 mm
d	25 mm
D	47 mm
B	12 mm
Bore	0.984 Inch 25 Millimeter
Noun	Bearing
Weight	0,08 Kg
da max	30,5 mm
UNSPSC	31171504
r min.	0,6 mm
da min.	29 mm
ra max.	0,6 mm
series:	60
Da max.	43 mm
Category	Single Row Ball Bearing
Enclosure	2 Seals
Size (mm)	25x47x12
Inventory	0.0
Snap Ring	No
Width (mm)	12
bore type:	Round
maximum rpm:	18000 RPM
Weight / LBS	0.174
Cage Material	Steel
Inch - Metric	Metric
closure type:	Double Sealed
Product Group	B00308
bore diameter:	25 mm
Keyword String	Ball

overall width:	12 mm
cage material:	Steel
fillet radius:	0.6 mm
Bearing number	6005LLB
Enclosure Type	Non-Contact Seal
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
finish/coating:	Uncoated
Long Description	25MM Bore; 47MM Outside Diameter; 12MM Outer Race Diameter; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Manufacturer URL	http://www.ntnamerica.com
Outer Race Width	0.472 Inch 12 Millimeter
Outside Diameter	1.85 Inch 47 Millimeter
bearing material:	High Carbon Chrome Steel
outer ring width:	12 mm
inner ring width:	12 mm
Manufacturer Name	NTN
Weight / Kilogram	0.078
precision rating:	ISO Class 0
outside diameter:	47 mm
Bore Diameter (mm)	25
Internal Clearance	C0-Medium
snap ring included:	Without Snap Ring
Outer Diameter (mm)	47
internal clearance:	CN
Minimum Buy Quantity	N/A

static load capacity:	5850 N
maximum rpm (grease):	15000 rpm
row type & fill slot:	Single Row Non-Fill Slot
dynamic load capacity:	10100 N
Harmonized Tariff Code	8482.10.50.68
Manufacturer Item Number	6005LLB/2AU1
Internal Special Features	No
(Grease) Lubrication Speed	15 000 r/min
manufacturer product page:	Click here
operating temperature range:	-40 to 120 °C
Basic dynamic load rating (C)	10,1 kN
Basic static load rating (C0)	5,85 kN
Maximum Capacity / Filling Slot	No