


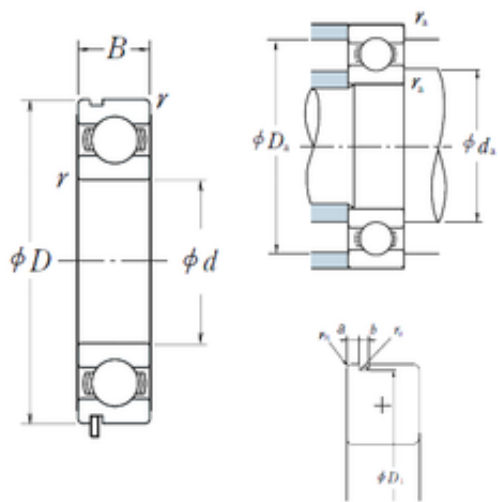

Bearing No. 6005N

a	2,06 mm
r	0.6
d	25 mm
D	47 mm
B	12 mm
C	12 mm
b	1,35 mm
fo	14.5
B_	12
ra	0.6
C0	5.85
D1	44,6 mm
D_	47
Z_	10
rn	0,5 mm
ro	0.4
DE_	41.85
SRI	3.21
D_a	43
DA_	6.35
SRE	3.37
DI_	29.15
yobi	6005N
mass	0.079
SBRG	10
bomp	0
KBRG	6101
SREX	0.04
SREN	0
SRIN	0

SDM_	35.5
SRIX	0.02
ALPHA_	0
r min.	0,6 mm
C_conv	10100
da max	30 mm
da min	29
Weight	0,079 Kg
LangID	1
ra max.	0,6 mm
Da max.	43 mm
Oil rpm	18000
da min.	29 mm
r0 max.	0,4 mm
hidYobi	6005N
GRS rpm	15000
hidTable	ecat_NSRDGB
Size (mm)	25x47x12
Prod_Type3	DGBB_SR_N_OT
Width (mm)	12
Bearing number	6005N
Bore Diameter (mm)	25
Outer Diameter (mm)	47
(Oil) Lubrication Speed	18 000 r/min
(Grease) Lubrication Speed	15 000 r/min
Basic dynamic load rating (C)	10,1 kN
Basic static load rating (C0)	5,85 kN