


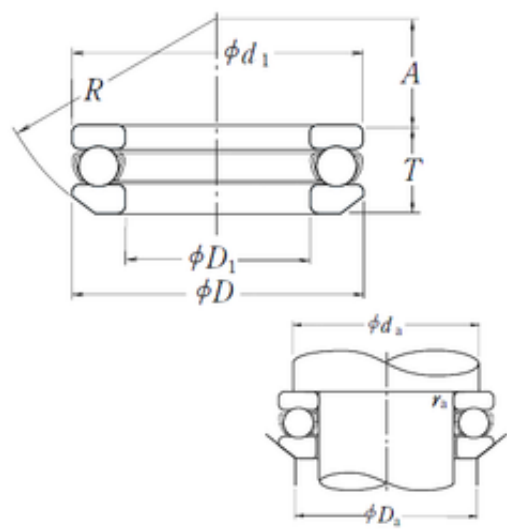

Bearing No. 53307

C	56
r	1
d	35 mm
D	68 mm
T	25,6 mm
A	24 mm
R	56 mm
R_	56
C0	105
ra	1
da	55
Z_	12
A_	24
B_	25.6
T3	25.6
D_	68
D1	37 mm
d1	68 mm
D_1	37
D_a	48
SRE	6.45
SRI	6.45
DA_	11.906
SREX	0.05
SRIN	0
KBRG	5121
SREN	0
mass	0.403
Noun	Bearing
yobi	53307

SRIX	0.05
SDM_	51.5
Bore 1	1.378 Inch 35 Millimeter
LangID	1
Height	1.024 Inch 26 Millimeter
Bore 2	1.457 Inch 37 Millimeter
Banded	No
UNSPSC	31171552
Weight	0,403 Kg
r min.	1 mm
hidYobi	53307
da min.	55 mm
Da max.	48 mm
ra max.	1 mm
Oil rpm	3800
GRS rpm	2400
series:	52300
Category	Thrust Ball Bearings
hidTable	ecat_NSSDTB
Inventory	0.0
Size (mm)	35x68x25.6
Prod_Type3	TB_SD_WAS
race type:	Flat
Width (mm)	25,6
Weight / LBS	0.88846
maximum rpm:	3800 rpm
Inch - Metric	Metric
Product Group	B00308
Cage Material	Steel
Bearing number	53307

fillet radius:	1 mm
bore diameter:	35 mm
cage material:	Steel Cage
Thrust Bearing	Yes
Other Features	Single Row With Aligning Seat
overall width:	28 mm
Keyword String	Ball Thrust
Rolling Element	Ball Bearing
Precision Class	Non-Precision
Long Description	35MM Bore 1; 37MM Bore 2; 68MM Outside Diameter; 26MM Height; Ball Bearing; Single Direction; Not Banded; Steel Cage; Non-Precision
Manufacturer URL	http://www.nskamericas.com
Outside Diameter	2.677 Inch 68 Millimeter
Manufacturer Name	NSK
outside diameter:	68 mm
precision rating:	ABEC1, P0
Weight / Kilogram	0.48
Bore Diameter (mm)	35
Outer Diameter (mm)	68
Minimum Buy Quantity	N/A
separable or banded:	Separable
thrust bearing type:	Single-Direction
static load capacity:	23500 lbf
Component Description	Roller Assembly Plus Raceways
Harmonized Tariff Code	8482.10.50.08
dynamic load capacity:	12600 lbf

outside diameter design:	Straight
Manufacturer Item Number	53307
(Grease) Lubrication Speed	2400 r/min
Single or Double Direction	Single Direction
operating temperature range:	Maximum of +120 °C
Basic static load rating (C0)	105 kN
Basic dynamic load rating (C)	56 kN
Overall Height with Aligning Washer	0 Inch 0 Millimeter