


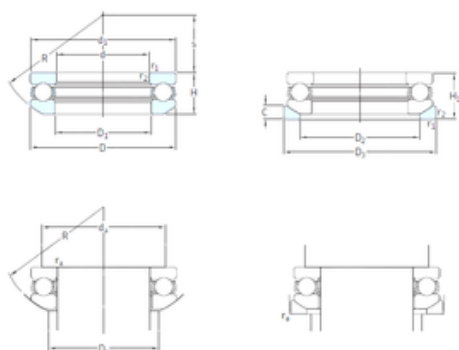

**Bearing No. 53307+U307**

|                               |            |
|-------------------------------|------------|
| C                             | 7,5 mm     |
| R                             | 56 mm      |
| d                             | 35 mm      |
| D                             | 68 mm      |
| H                             | 25,6 mm    |
| s                             | 24 mm      |
| D1                            | 37 mm      |
| H1                            | 28 mm      |
| d1                            | 68 mm      |
| D3                            | 72 mm      |
| D2                            | 52 mm      |
| Weight                        | 0,46 Kg    |
| r1 min.                       | 1 mm       |
| r2 min.                       | 1 mm       |
| Da max.                       | 52 mm      |
| rb max.                       | 1 mm       |
| da min.                       | 55 mm      |
| Size (mm)                     | 35x68x25.6 |
| Width (mm)                    | 25,6       |
| Bearing number                | 53307+U307 |
| Limiting speed                | 4500 r/min |
| Reference speed               | 3200 r/min |
| Bore Diameter (mm)            | 35         |
| Outer Diameter (mm)           | 68         |
| Fatigue load limit (Pu)       | 3,55       |
| Basic dynamic load rating (C) | 49,4 kN    |
| Basic static load rating (C0) | 96,5 kN    |