


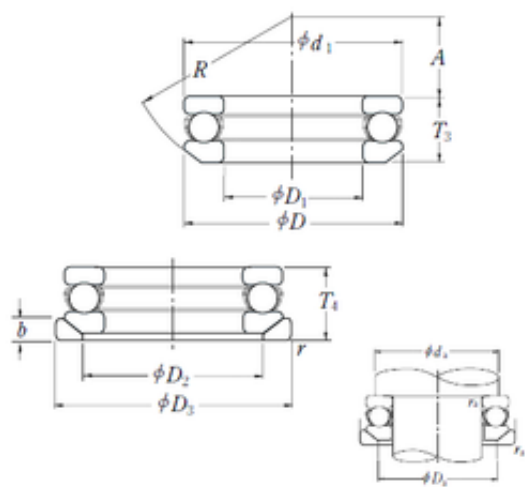

Bearing No. 53307U

C	56
D	68 mm
R	56 mm
A	24 mm
T	28 mm
b	7,5 mm
d	35 mm
r	1
A_	24
D_	68
Z_	12
da	55
T3	25.6
C0	105
T4	28
ra	1
B_	28
R_	56
D2	52 mm
D3	72 mm
D1	37 mm
d1	68 mm
D_2	52
D_3	72
SRE	6.45
D_1	37
SRI	6.45
DA_	11.906
D_a	48
SREX	0.05

SRIN	0
SREN	0
mass	0.488
yobi	53307U
SDM_	51.5
SRIX	0.05
KBRG	5131
r min.	1 mm
LangID	1
Weight	0,488 Kg
ra max.	1 mm
GRS rpm	2400
Oil rpm	3800
da min.	55 mm
Da max.	48 mm
hidYobi	53307U
hidTable	ecat_NSSDTB
Size (mm)	35x68x28
Prod_Type3	TB_SD_WASW
Width (mm)	28
Bearing number	53307U
Bore Diameter (mm)	35
Outer Diameter (mm)	68
(Grease) Lubrication Speed	2400 r/min
Basic static load rating (C0)	105 kN
Basic dynamic load rating (C)	56 kN