


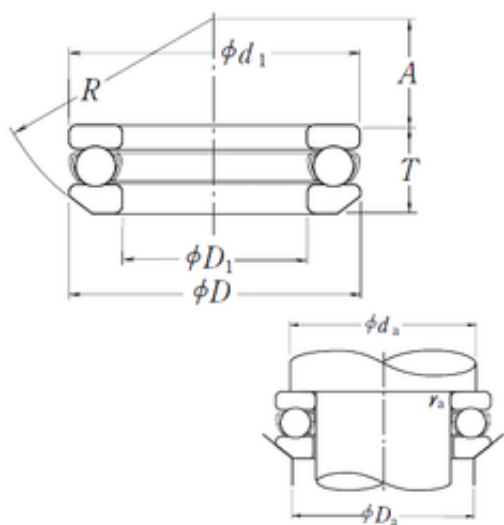

Bearing No. 53308

R	64 mm
C	70
r	1
d	40 mm
D	78 mm
T	28,5 mm
A	28 mm
R_	64
B_	28.5
ra	1
C0	135
da	63
Z_	12
A_	28
T3	28.5
d1	78 mm
D_	78
D1	42 mm
D_1	42
DA_	13.494
SRI	7.25
SRE	7.25
D_a	55
SREN	0
SRIN	0
yobi	53308
SRIX	0.05
mass	0.581
SDM_	59
KBRG	5121

SREX	0.05
Noun	Bearing
Weight	0,581 Kg
Bore 2	1.654 Inch 42 Millimeter
Banded	No
UNSPSC	31171552
r min.	1 mm
LangID	1
Bore 1	1.575 Inch 40 Millimeter
Height	1.142 Inch 29 Millimeter
GRS rpm	2200
hidYobi	53308
Oil rpm	3400
ra max.	1 mm
Da max.	55 mm
da min.	63 mm
Category	Thrust Ball Bearings
hidTable	ecat_NSSDTB
Size (mm)	40x78x28.5
Inventory	0.0
Prod_Type3	TB_SD_WAS
Width (mm)	28,5
Weight / LBS	1.28089
Product Group	B00308
Cage Material	Steel
Inch - Metric	Metric
Bearing number	53308
Other Features	Single Row With Aligning Seat
Thrust Bearing	Yes

Keyword String	Ball Thrust
Rolling Element	Ball Bearing
Precision Class	Non-Precision
Manufacturer URL	http://www.nskamericas.com
Long Description	40MM Bore 1; 42MM Bore 2; 78MM Outside Diameter; 29MM Height; Ball Bearing; Single Direction; Not Banded; Steel Cage; Non-Precision
Outside Diameter	3.071 Inch 78 Millimeter
Weight / Kilogram	0.69
Manufacturer Name	NSK
Bore Diameter (mm)	40
Outer Diameter (mm)	78
Minimum Buy Quantity	N/A
Component Description	Roller Assembly Plus Raceways
Harmonized Tariff Code	8482.10.50.08
(Grease) Lubrication Speed	2200 r/min
Single or Double Direction	Single Direction
Basic static load rating (C0)	135 kN
Basic dynamic load rating (C)	70 kN
Overall Height with Aligning Washer	0 Inch 0 Millimeter