


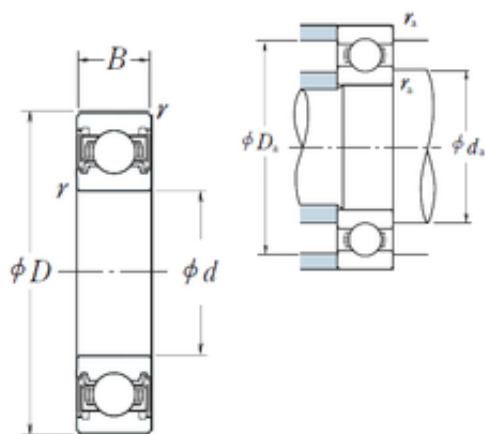

Bearing No. 6005VV

D	47 mm
d	25 mm
B	12 mm
C	12 mm
r	0.6
Z_	10
B_	12
D_	47
ra	0.6
C0	5.85
fo	14.5
DI_	29.15
SRI	3.21
D_a	43
DE_	41.85
DA_	6.35
SRE	3.37
SRIN	0
SBRG	10
yobi	6005VV
SDM_	35.5
SREX	0.04
KBRG	6151
bomp	0
mass	0.079
Bore	0.984 Inch 25 Millimeter
SRIX	0.02
SREN	0
Noun	Bearing

ALPHA_	0
da min	29
LangID	1
r min.	0,6 mm
UNSPSC	31171504
C_conv	10100
da max	30 mm
Weight	0,079 Kg
hidYobi	6005VV
Da max.	43 mm
da min.	29 mm
ra max.	0,6 mm
GRS rpm	15000
hidTable	ecat_NSRDGB
Category	Single Row Ball Bearing
Inventory	0.0
Enclosure	2 Seals
Snap Ring	No
Size (mm)	25x47x12
Width (mm)	12
Prod_Type3	DGBB_SR_VV
Weight / LBS	0.08
Product Group	B00308
Cage Material	Steel
Inch - Metric	Metric
Bearing number	6005VV
Keyword String	Ball
Enclosure Type	Non-Contact Seal
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Outer Race Width	0.472 Inch 12 Millimeter
Outside Diameter	1.85 Inch 47 Millimeter

Long Description	25MM Bore; 47MM Outside Diameter; 12MM Outer Race Diameter; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Manufacturer URL	http://www.nskamericas.com
Weight / Kilogram	0.04
Manufacturer Name	NSK
Internal Clearance	C0-Medium
Bore Diameter (mm)	25
Outer Diameter (mm)	47
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
Manufacturer Item Number	6005VV
Internal Special Features	No
(Grease) Lubrication Speed	15 000 r/min
Basic static load rating (C0)	5,85 kN
Basic dynamic load rating (C)	10,1 kN
Maximum Capacity / Filling Slot	No