


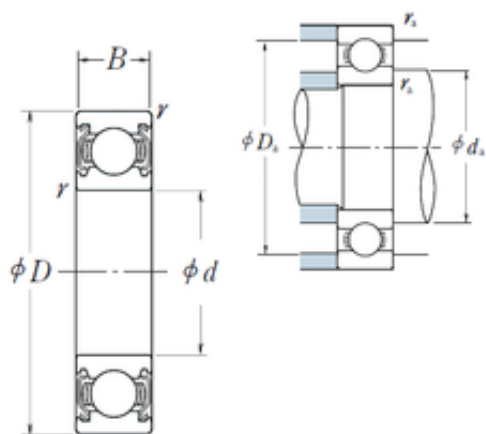

Bearing No. 6005ZZ

r	0.6
d	25 mm
D	47 mm
B	12 mm
C	12 mm
fo	14.5
D_	47
B_	12
ra	0.6
Z_	10
C0	5.85
DI_	29.15
SRE	3.37
D_a	43
DE_	41.85
SRI	3.21
DA_	6.35
SREN	0
Noun	Bearing
SRIN	0
bomp	0
SRIX	0.02
yobi	6005ZZ
mass	0.079
SDM_	35.5
KBRG	6141
SREX	0.04
SBRG	10
Bore	0.984 Inch 25 Millimeter

da max	30 mm
Weight	0,079 Kg
da min	29
r min.	0,6 mm
UNSPSC	31171504
ALPHA_	0
LangID	1
C_conv	10100
Da max.	43 mm
ra max.	0,6 mm
da min.	29 mm
hidYobi	6005ZZ
GRS rpm	15000
Category	Single Row Ball Bearing
hidTable	ecat_NSRDGB
Enclosure	2 Metal Shields
Size (mm)	25x47x12
Snap Ring	No
Inventory	2.0
Prod_Type3	DGBB_SR_ZZ
Width (mm)	12
bore type:	Round
Weight / LBS	0.08
Product Group	B00308
closure type:	Double Shielded
Inch - Metric	Metric
Cage Material	Steel
Bearing number	6005ZZ
overall width:	12 mm
Keyword String	Ball
bore diameter:	25 mm
Precision Class	ABEC 1 ISO P0

Rolling Element	Ball Bearing
Outer Race Width	0.472 Inch 12 Millimeter
Long Description	25MM Bore; 47MM Outside Diameter; 12MM Outer Race Diameter; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Manufacturer URL	http://www.nskamericas.com
Outside Diameter	1.85 Inch 47 Millimeter
Weight / Kilogram	0.04
outside diameter:	47 mm
Manufacturer Name	NSK
Internal Clearance	C0-Medium
Bore Diameter (mm)	25
internal clearance:	Normal Clearance
Outer Diameter (mm)	47
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
manufacturer upc number:	029176012648
Manufacturer Item Number	6005ZZ
Internal Special Features	No
(Grease) Lubrication Speed	15 000 r/min
Basic dynamic load rating (C)	10,1 kN
Basic static load rating (C0)	5,85 kN
Maximum Capacity /	No

Filling Slot	
--------------	--