


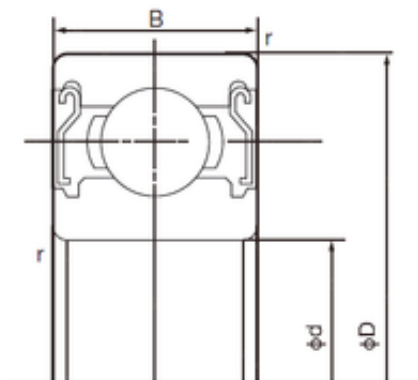

Bearing No. 6005ZZE

D	47 mm
d	25 mm
B	12 mm
C	12 mm
Noun	Bearing
Bore	0.984 Inch 25 Millimeter
Width	12 mm
UNSPSC	31171504
r min.	0.6 mm
Weight	0.079 Kg
da min.	29 mm
Da max.	43 mm
ra max.	0.6 mm
Category	Single Row Ball Bearing
ra (max)	0.6 mm
da (min)	29 mm
Da (max)	43 mm
Bore Size	25 mm
Factor fo	14.5
Inventory	0.0
Bore Type	Cylindrical Bore
Enclosure	2 Metal Shields
Snap Ring	No
Size (mm)	25x47x12
Width (mm)	12
Inch - Metric	Metric
Configuration	Single Row
Product Group	B00308
Cage Material	Steel

Keyword String	Ball
Other Features	Deep Groove
Bearing number	6005ZZE
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
Long Description	25MM Bore; 47MM Outside Diameter; 12MM Outer Race Width; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Stee
Outside Diameter	1.85 Inch 47 Millimeter
Radial Clearance	0.005 to 0.020 mm
Inner Race Width	0 Inch 0 Millimeter
Manufacturer URL	http://www.nachiamerica.com
Outer Race Width	0.472 Inch 12 Millimeter
Manufacturer Name	NACHI
Weight / Kilogram	0
Internal Clearance	C0-Medium
Static Load Rating	5,850 N
Bore Diameter (mm)	25
Dynamic Load Rating	10,100 N
Outer Diameter (mm)	47
Minimum Buy Quantity	N/A
Fillet Radius/Chamfer	0.6 mm
Harmonized Tariff Code	8482.10.50.68
Limiting Speed - Grease	15,000 rpm
Internal Special Features	No
(Grease) Lubrication	15000 r/min

Speed	
Basic static load rating (C0)	5,85 kN
Basic dynamic load rating (C)	10,1 kN
Maximum Capacity / Filling Slot	No