


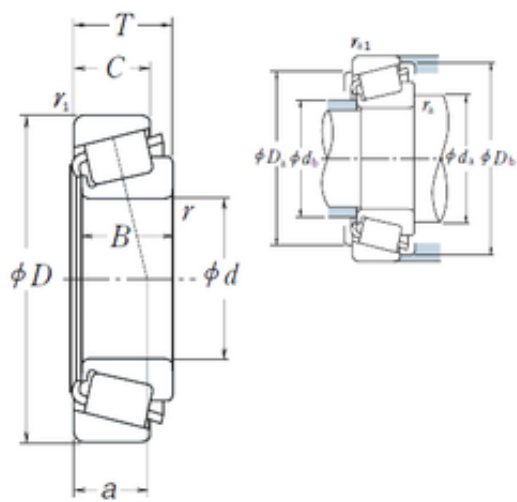

Bearing No. JH415647/JH415610

e	0.36
d	75 mm
D	145 mm
T	51 mm
B	51 mm
C	42 mm
a	36,7 mm
Da	129 mm
B_	51
Db	139 mm
da	94 mm
Y0	0.91
db	89 mm
C0	410
D_	145
Z_	17
C_	42
Y1	1.7
DE_	127.885
SLR	40.5
D_a	129
DI_	94.576
DA1	18.328
DA2	15.804
CUP	1.19
DA_	17.071
D_b	139
RAr	293.119
SDM_	111.368
KBRG	3141

yobi	JH415647/JH415610
CONE	2.64
ALP21	27
ALP22	8
ALP23	0
BETA_	1
BET21	3
BET23	0
BET22	35
r min.	3 mm
LangID	1
Weight	3,83 Kg
ALPHA_	13.567
r1 min.	2,5 mm
ra max.	3 mm
Oil rpm	3400
outer r	2.5
hidYobi	JH415647/JH415610
GRS rpm	2600
inner r	3
hidTable	ecat_NSTPRI
inner ra	3
outer rb	2.5
ra1 max.	2,5 mm
Size (mm)	75x145x51
SHOG_yobi	JH415647R/JH415610R
Prod_Type3	TRBSR_ID_A
Width (mm)	51
Bearing number	JH415647/JH415610
Bore Diameter (mm)	75
Outer Diameter (mm)	145
Calculation factor (e)	0,36

(Oil) Lubrication Speed	3400 r/min
Calculation factor (Y0)	0,91
(Grease) Lubrication Speed	2600 r/min
Basic static load rating (C0)	410 kN
Basic dynamic load rating (C)	287 kN