


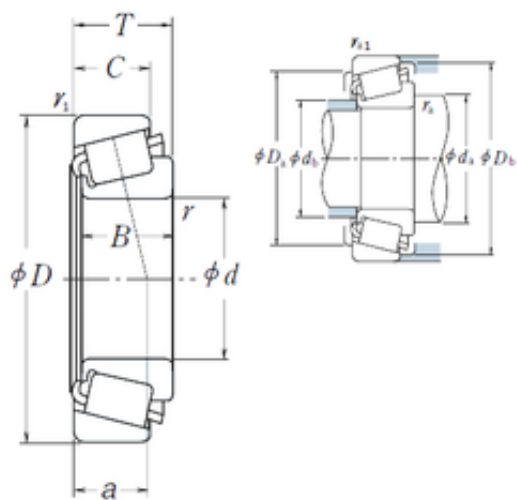

Bearing No. JHM318448/JHM318410

e	0.34
d	90 mm
D	155 mm
T	44 mm
B	44 mm
C	35,5 mm
a	34,1 mm
Da	140 mm
B_	44
Db	148 mm
da	106 mm
Y0	0.96
db	100 mm
C0	395
D_	155
Z_	19
C_	35.5
Y1	1.7
DE_	139.019
SLR	34
D_a	140
DI_	105.124
DA1	18.283
DA2	16.411
CUP	1.01
DA_	17.351
D_b	148
RAr	330.864
SDM_	122.225
KBRG	3141

yobi	JHM318448/JHM318410
CONE	2.32
ALP21	25
ALP22	37
ALP23	20
BETA_	1
BET21	3
BET23	0
BET22	10
r min.	3 mm
LangID	1
Weight	3,33 Kg
ALPHA_	12.811
r1 min.	2,5 mm
ra max.	3 mm
Oil rpm	3000
outer r	2.5
hidYobi	JHM318448/JHM318410
GRS rpm	2200
inner r	3
hidTable	ecat_NSTPRI
inner ra	3
outer rb	2.5
ra1 max.	2,5 mm
Size (mm)	90x155x44
SHOG_yobi	JHM318448R/410R
Prod_Type3	TRBSR_ID_A
Width (mm)	44
Bearing number	JHM318448/JHM318410
Bore Diameter (mm)	90

Outer Diameter (mm)	155
Calculation factor (e)	0,34
(Oil) Lubrication Speed	3000 r/min
Calculation factor (Y0)	0,96
(Grease) Lubrication Speed	2200 r/min
Basic static load rating (C0)	395 kN
Basic dynamic load rating (C)	274 kN