


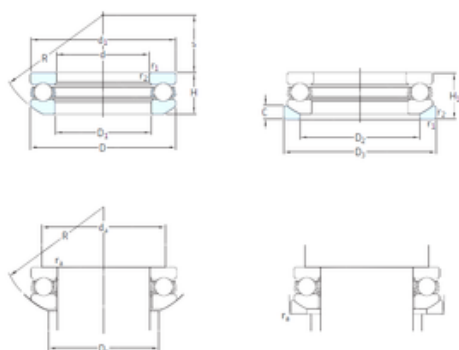

Bearing No. 53308+U308

C	8,5 mm
R	64 mm
d	40 mm
D	78 mm
H	28,5 mm
s	28 mm
D1	42 mm
H1	31 mm
d1	78 mm
D3	82 mm
D2	60 mm
Weight	0,67 Kg
r1 min.	1 mm
r2 min.	1 mm
Da max.	60 mm
rb max.	1 mm
da min.	63 mm
Size (mm)	40x78x28.5
Width (mm)	28,5
Bearing number	53308+U308
Limiting speed	4000 r/min
Reference speed	2800 r/min
Bore Diameter (mm)	40
Outer Diameter (mm)	78
Fatigue load limit (Pu)	4,5
Basic dynamic load rating (C)	61,8 kN
Basic static load rating (C0)	122 kN