


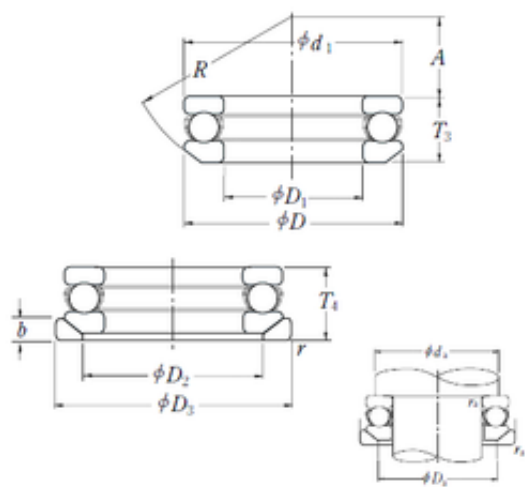

Bearing No. 53308U

C	70
D	78 mm
R	64 mm
A	28 mm
T	31 mm
b	8,5 mm
d	40 mm
r	1
A_	28
D_	78
Z_	12
da	63
T3	28.5
C0	135
T4	31
ra	1
B_	31
R_	64
D2	60 mm
D3	82 mm
D1	42 mm
d1	78 mm
D_2	60
D_3	82
SRE	7.25
D_1	42
SRI	7.25
DA_	13.494
D_a	55
SREX	0.05

SRIN	0
SREN	0
mass	0.704
yobi	53308U
SDM_	59
SRIX	0.05
KBRG	5131
r min.	1 mm
LangID	1
Weight	0,704 Kg
ra max.	1 mm
GRS rpm	2200
Oil rpm	3400
da min.	63 mm
Da max.	55 mm
hidYobi	53308U
hidTable	ecat_NSSDTB
Size (mm)	40x78x31
Prod_Type3	TB_SD_WASW
Width (mm)	31
Bearing number	53308U
Bore Diameter (mm)	40
Outer Diameter (mm)	78
(Grease) Lubrication Speed	2200 r/min
Basic static load rating (C0)	135 kN
Basic dynamic load rating (C)	70 kN