


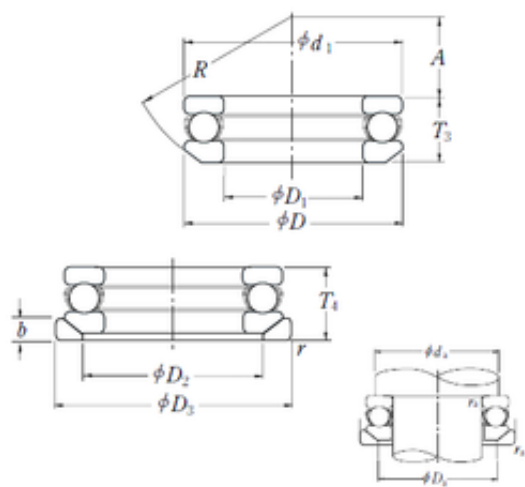

Bearing No. 53309U

C	80.5
D	85 mm
R	64 mm
A	25 mm
T	33 mm
b	10 mm
d	45 mm
r	1
A_	25
D_	85
Z_	13
da	69
T3	30.1
C0	163
T4	33
ra	1
B_	33
R_	64
D2	65 mm
D3	90 mm
D1	47 mm
d1	85 mm
D_2	65
D_3	90
SRE	7.7
D_1	47
SRI	7.7
DA_	14.288
D_a	61
SREX	0.065

SRIN	0
SREN	0
mass	0.888
yobi	53309U
SDM_	65
SRIX	0.065
KBRG	5131
r min.	1 mm
LangID	1
Weight	0,888 Kg
ra max.	1 mm
GRS rpm	2000
Oil rpm	3000
da min.	69 mm
Da max.	61 mm
hidYobi	53309U
hidTable	ecat_NSSDTB
Size (mm)	45x85x33
Prod_Type3	TB_SD_WASW
Width (mm)	33
Bearing number	53309U
Bore Diameter (mm)	45
Outer Diameter (mm)	85
(Grease) Lubrication Speed	2000 r/min
Basic static load rating (C0)	163 kN
Basic dynamic load rating (C)	80,5 kN