


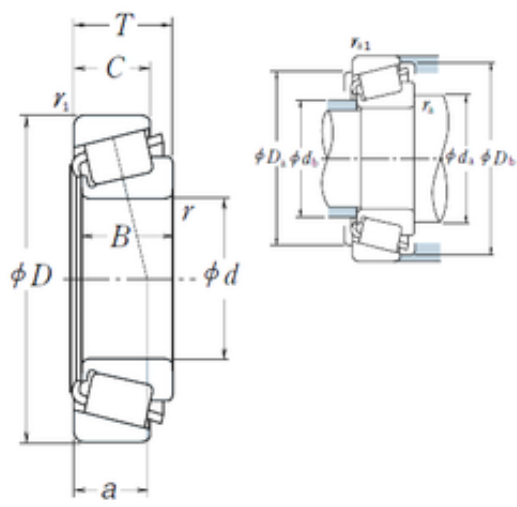

Bearing No. JH211749/JH211710

e	0.34
d	65 mm
D	120 mm
T	39 mm
B	38,5 mm
C	32 mm
a	27,9 mm
Da	107 mm
B_	38.5
Db	114 mm
da	80 mm
Y0	0.98
db	74 mm
C0	249
D_	120
Z_	17
C_	32
Y1	1.8
DE_	105.764
SLR	30
D_a	107
DI_	78.198
DA1	14.902
DA2	13.163
CUP	0.625
DA_	14.036
D_b	114
RAr	256.2
SDM_	92.046
KBRG	3141

yobi	JH211749/JH211710
CONE	1.25
ALP21	25
ALP22	20
ALP23	0
BETA_	1
BET21	3
BET23	0
BET22	20
r min.	3 mm
LangID	1
Weight	1,875 Kg
ALPHA_	12.667
r1 min.	2,5 mm
ra max.	3 mm
Oil rpm	4000
outer r	2.5
hidYobi	JH211749/JH211710
GRS rpm	3000
inner r	3
hidTable	ecat_NSTPRI
inner ra	3
outer rb	2.5
ra1 max.	2,5 mm
Size (mm)	65x120x39
SHOG_yobi	JH211749R/JH211710R
Prod_Type3	TRBSR_ID_A
Width (mm)	39
Bearing number	JH211749/JH211710
Bore Diameter (mm)	65
Outer Diameter (mm)	120
Calculation factor (e)	0,34

(Oil) Lubrication Speed	4000 r/min
Calculation factor (Y0)	0,98
(Grease) Lubrication Speed	3000 r/min
Basic static load rating (C0)	249 kN
Basic dynamic load rating (C)	185 kN