


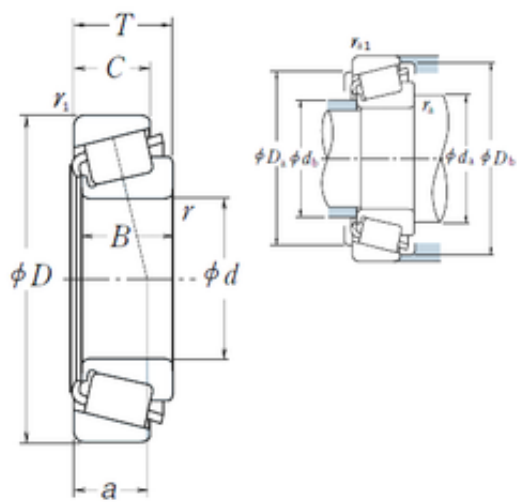

Bearing No. JH217249/JH217210

e	0.33
d	85 mm
D	150 mm
T	46 mm
B	46 mm
C	38 mm
a	33,9 mm
Da	134 mm
B_	46
Db	142 mm
da	101 mm
Y0	0.99
db	95 mm
C0	390
D_	150
Z_	18
C_	38
Y1	1.8
DE_	133.39
SLR	36.5
D_a	134
DI_	99.942
DA1	18.042
DA2	16.032
CUP	1.09
DA_	17.041
D_b	142
RAr	326.5
SDM_	116.753
KBRG	3141

yobi	JH217249/JH217210
CONE	2.29
ALP21	25
ALP22	0
ALP23	0
BETA_	1
BET21	3
BET23	0
BET22	10
r min.	3 mm
LangID	1
Weight	3,38 Kg
ALPHA_	12.5
r1 min.	2,5 mm
ra max.	3 mm
Oil rpm	3200
outer r	2.5
hidYobi	JH217249/JH217210
GRS rpm	2400
inner r	3
hidTable	ecat_NSTPRI
inner ra	3
outer rb	2.5
ra1 max.	2,5 mm
Size (mm)	85x150x46
SHOG_yobi	JH217249R/JH217210R
Prod_Type3	TRBSR_ID_A
Width (mm)	46
Bearing number	JH217249/JH217210
Bore Diameter (mm)	85
Outer Diameter (mm)	150
Calculation factor (e)	0,33

(Oil) Lubrication Speed	3200 r/min
Calculation factor (Y0)	0,99
(Grease) Lubrication Speed	2400 r/min
Basic static load rating (C0)	390 kN
Basic dynamic load rating (C)	275 kN