


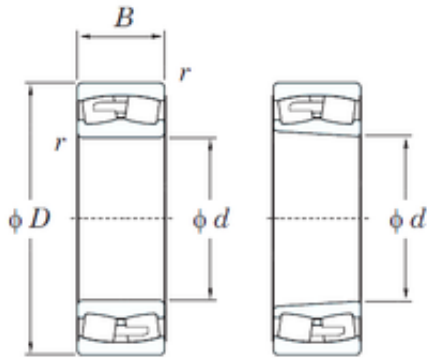

Bearing No. 23280RHA

|                        |             |
|------------------------|-------------|
| D                      | 720 mm      |
| d                      | 400 mm      |
| B                      | 256 mm      |
| C                      | 256 mm      |
| e                      | 0.35        |
| Cu                     | 665         |
| Y1                     | 1.92        |
| Y0                     | 1.88        |
| Y2                     | 2.86        |
| Cr                     | 7320        |
| C0r                    | 10600       |
| r(min)                 | 6           |
| Weight                 | 441 Kg      |
| r min.                 | 6 mm        |
| ra max.                | 5 mm        |
| Da max.                | 692 mm      |
| ra(max)                | 5           |
| Da(max)                | 692         |
| da(min)                | 428         |
| da min.                | 428 mm      |
| Oil lub.               | 460         |
| Size (mm)              | 400x720x256 |
| Width (mm)             | 256         |
| Grease lub.            | 350         |
| Bearing No.            | 23280RHA    |
| Bearing number         | 23280RHA    |
| (Refer.)Mass(kg)       | 441         |
| Bore Diameter (mm)     | 400         |
| Outer Diameter (mm)    | 720         |
| Calculation factor (e) | 0,35        |
|                        |             |

|                               |           |
|-------------------------------|-----------|
| Calculation factor (Y1)       | 1,92      |
| Calculation factor (Y0)       | 1,88      |
| (Oil) Lubrication Speed       | 460 r/min |
| (Grease) Lubrication Speed    | 350 r/min |
| Basic static load rating (C0) | 10600 kN  |
| Basic dynamic load rating (C) | 5850 kN   |