


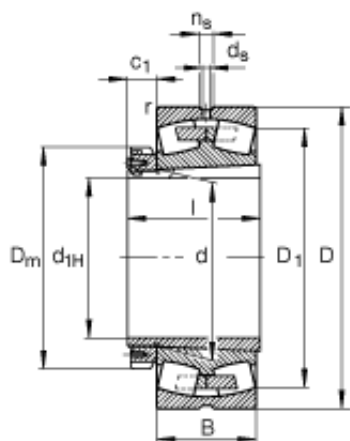

Bearing No. 230/600-B-K-MB + H30/600-HG

d	600 mm
l	289 mm
D	870 mm
B	200 mm
c	75 mm
m	388 kg / Weight
e	0,22
Size (mm)	560x870x200
Width (mm)	200
n_B	890000 N / Fatigue limit load, radial
C_r	5700000 N / Dynamic load rating (radial)
n_s	23,5 mm
d_s	12,5 mm
D_1	791,9 mm
D_m	700 mm
Y_1	3,07
c_1	96 mm
Y_2	4,57
Y_0	3
n_G	720 1/min / Limiting speed
m_1	149 kg
C_{0r}	12500000 N / Static load rating (radial)
Bearing number	230/600-B-K-MB + H30/600-HG
d_{1H}	560 mm
r_{min}	6 mm

$r_{a \max}$	5 mm
$d_{a \max}$	661 mm
$D_{a \max}$	847 mm
$B_{a \min}$	20 mm
$d_{b \min}$	622 mm
Bore Diameter (mm)	560
Outer Diameter (mm)	870
- H30/600-HG / Adapter sleeve	H30/600HG / Adapter sleeve