




Bearing No. 230/600-B-K-MB+AH30/600A

n	23,5 mm
C	200 mm
b	45 mm
a	14 mm
l	245 mm
d	600 mm
D	870 mm
B	200 mm
d5	12,5 r/min
D1	791,9 mm
d1	570 mm
Weight	463,6 Kg
r min.	6 mm
da min.	623 mm
Da max.	847 mm
ra max.	5 mm
Size (mm)	600x870x200
Width (mm)	200
Thread (G)	Tr630X6
Limiting speed	530 r/min
Bearing number	230/600-B-K-MB+AH30/600A
Reference speed	405 r/min
Bore Diameter (mm)	600
Outer Diameter (mm)	870
Calculation factor (e)	0,22
Fatigue load limit (Pu)	890
Calculation factor (Y0)	3
Calculation factor (Y1)	3,07
Basic dynamic load rating (C)	5700 kN

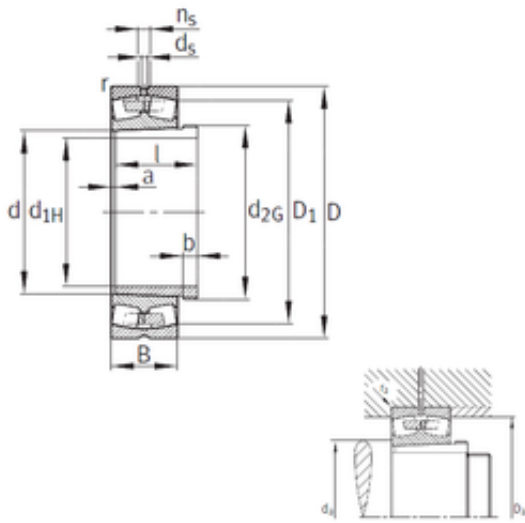

Loyal | 230/600-B-K-MB+AH30/600A

Basic static load rating (C0)	12500 kN
----------------------------------	----------