


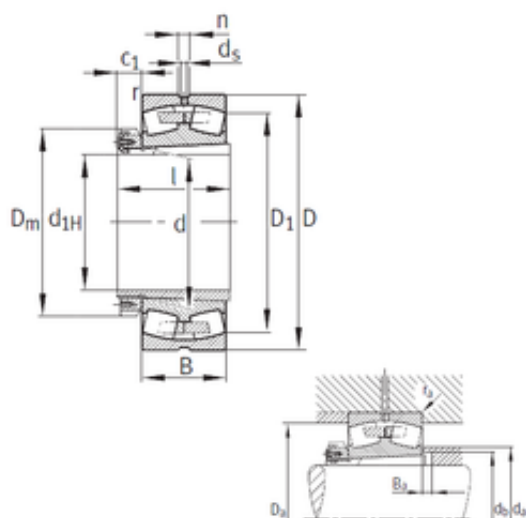

Bearing No. 230/600-B-K-MB+H30/600

C	200 mm
l	289 mm
n	23,5 mm
d	600 mm
D	870 mm
B	200 mm
D1	791,9 mm
C1	96 mm
d5	12,5 r/min
Dm	700 mm
d1	560 mm
Weight	537 Kg
r min.	6 mm
da max	661 mm
db min	622 mm
ba min.	20 mm
Da max.	847 mm
ra max.	5 mm
Size (mm)	600x870x200
Width (mm)	200
Limiting speed	530 r/min
Bearing number	230/600-B-K-MB+H30/600
Reference speed	405 r/min
Bore Diameter (mm)	600
Outer Diameter (mm)	870
Calculation factor (e)	0,22
Fatigue load limit (Pu)	890
Calculation factor (Y0)	3
Calculation factor (Y1)	3,07

Basic dynamic load rating (C)	5700 kN
Basic static load rating (C0)	12500 kN