


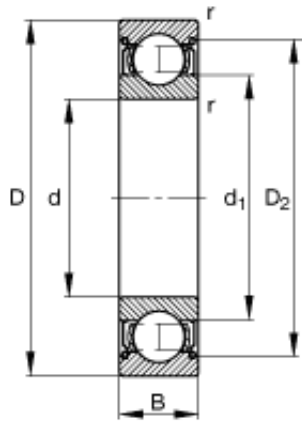

**Bearing No. 6006-2Z**

|                     |                                        |
|---------------------|----------------------------------------|
| m                   | 0,126 kg / Weight                      |
| d                   | 30 mm                                  |
| D                   | 55 mm                                  |
| B                   | 13 mm                                  |
| Size (mm)           | 30x55x13                               |
| Width (mm)          | 13                                     |
| d <sub>1</sub>      | 38,3 mm                                |
| n <sub>B</sub>      | 13100 1/min / Reference speed          |
| n <sub>G</sub>      | 15700 1/min / Limiting speed           |
| D <sub>2</sub>      | 49,2 mm                                |
| C <sub>r</sub>      | 13500 N / Dynamic load rating (radial) |
| C <sub>0r</sub>     | 8000 N / Static load rating (radial)   |
| Bearing number      | 6006-2Z                                |
| C <sub>ur</sub>     | 405 N / Fatigue limit load, radial     |
| r <sub>min</sub>    | 1 mm                                   |
| r <sub>a max</sub>  | 1 mm                                   |
| d <sub>a min</sub>  | 34,6 mm                                |
| D <sub>a max</sub>  | 50,4 mm                                |
| Bore Diameter (mm)  | 30                                     |
| Outer Diameter (mm) | 55                                     |