


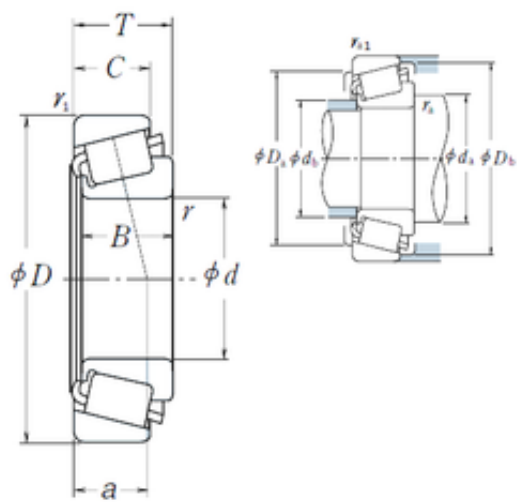

Bearing No. 02473/02420

e	0.42
d	25,4 mm
D	68,262 mm
T	22,225 mm
B	22,225 mm
C	17,462 mm
a	16,9 mm
Da	59 mm
B_	22.225
Db	63 mm
da	34,5 mm
Y0	0.79
db	33,5 mm
C0	64
D_	68.262
Z_	16
C_	17.462
Y1	1.4
DE_	56.822
SLR	15
D_a	59
DI_	41.267
DA1	8.63
DA2	7.502
CUP	0.152
DA_	8.069
D_b	63
RAr	114.139
SDM_	49.185
KBRG	3161

yobi	02473/02420
CONE	0.28
ALP21	31
ALP22	0
ALP23	0
BETA_	2
BET21	4
BET23	0
BET22	20
r min.	0,8 mm
LangID	1
Weight	0,432 Kg
ALPHA_	15.5
r1 min.	1,5 mm
ra max.	0,8 mm
Oil rpm	7500
outer r	1.5
hidYobi	02473/02420
GRS rpm	5600
inner r	0.8
hidTable	ecat_NSTPRI
inner ra	0.8
outer rb	1.5
ra1 max.	1,5 mm
Size (mm)	25.4x68.262x22.225
SHOG_yobi	02473R/02420R
Prod_Type3	TRBSR_ID_A
Width (mm)	22,225
Bearing number	02473/02420
Bore Diameter (mm)	25,4
Outer Diameter (mm)	68,262
Calculation factor (e)	0,42

(Oil) Lubrication Speed	7500 r/min
Calculation factor (Y0)	0,79
(Grease) Lubrication Speed	5600 r/min
Basic static load rating (C0)	64 kN
Basic dynamic load rating (C)	55 kN