


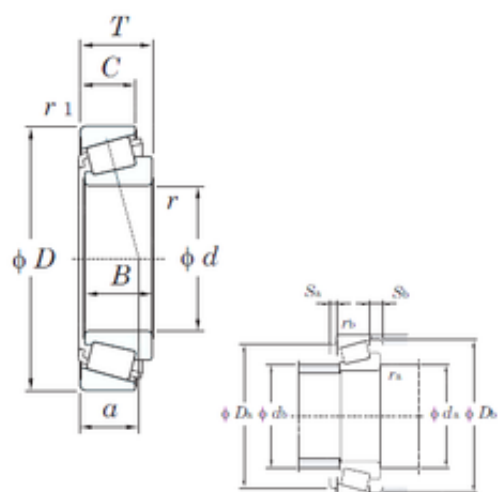

Bearing No. 30212JR

D	110 mm
d	60 mm
T	23,75 mm
B	22 mm
C	19 mm
a	21,9 mm
e	0.40
Cr	133
Cu	19.7
Y0	0.81
Y1	1.48
C0r	127
Bore	2.362 Inch 60 Millimeter
Noun	Bearing
a(mm)	21.9
Da min	96 mm
da max	70 mm
Weight	0,945 Kg
r min.	2 mm
r(min)	2
UNSPSC	31171516
Db(min)	103
db(max)	70
Da(max)	100
Da(min)	96
r1(min)	1.5
Sa(min)	4
Sb(min)	4.5
ra(max)	2

rb(max)	1.5
da(min)	70
ra max.	2 mm
Db min.	103 mm
Da max.	100 mm
da min.	70 mm
r2 min.	1,5 mm
rb max.	1,5 mm
Oil lub.	4700
Category	Tapered Roller Bearings Assembly
Size (mm)	60x110x23.75
Component	Assembly
Inventory	1.0
Width (mm)	23,75
Grease lub.	3500
Bearing No.	30212JR
Basic Number	30212
Weight / LBS	2.083
Inch - Metric	Metric
Product Group	B04334
Other Features	High Load Capacity
Keyword String	Tapered
Assembly Width	0.935 Inch 23.75 Millimeter
Bearing number	30212JR
Precision Class	Standard
(Refer.)Mass(kg)	0.945
Outside Diameter	4.331 Inch 110 Millimeter
Manufacturer URL	http://www.koyousa.com
Long Description	Assembly; Standard Precision; 60MM Bore; 110MM Outside

	Diameter; 23.75MM Assembly Width; Single Row of Rollers
Weight / Kilogram	0.95
Manufacturer Name	KOYO
Bore Diameter (mm)	60
Outer Diameter (mm)	110
Minimum Buy Quantity	N/A
Calculation factor (e)	0,4
Number of Tapered Rows	Single Row
Harmonized Tariff Code	8482.20.00.00
Flange Outside Diameter	0 Inch 0 Millimeter
(Oil) Lubrication Speed	4700 r/min
Calculation factor (Y0)	0,81
Manufacturer Item Number	30212JR
(Grease) Lubrication Speed	3500 r/min
Basic static load rating (C0)	127 kN
Basic dynamic load rating (C)	106 kN