


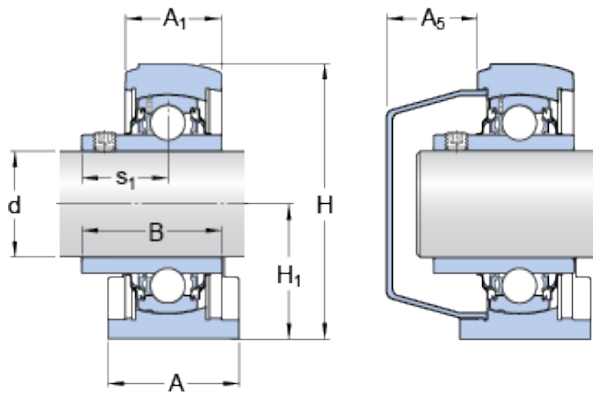

Bearing No. SYFWK 1. LTHR

|                     |                                 |
|---------------------|---------------------------------|
| J                   | 50.8 mm                         |
| B                   | 34.1 mm                         |
| L                   | 76 mm                           |
| H                   | 73.5 mm                         |
| d                   | 25.4 mm                         |
| A                   | 40 mm                           |
| Weight              | 0.33 kg                         |
| Housing             | SYFWK 505 L                     |
| Category            | Bearings                        |
| Inventory           | 0.0                             |
| Size (mm)           | 25.4x40x25.5                    |
| Width (mm)          | 25,5                            |
| A <sub>1</sub>      | 25.5 mm                         |
| H <sub>1</sub>      | 36.5 mm                         |
| H <sub>1</sub>      | 36.5 mm                         |
| s <sub>1</sub>      | 19.8 mm                         |
| A <sub>5</sub>      | 22 mm                           |
| A <sub>1</sub>      | 25.5 mm                         |
| Product Group       | M06110                          |
| s <sub>1</sub>      | 19.8 mm                         |
| Limiting speed      | 4300 r/min                      |
| Bearing number      | SYFWK 1. LTHR                   |
| Size thread - G     | M10                             |
| Housing material    | Composite for food and beverage |
| Mass bearing unit   | 0.33 kg                         |
| Manufacturer Name   | SKF                             |
| Weight / Kilogram   | 0                               |
| Bore Diameter (mm)  | 25,4                            |
| Outer Diameter (mm) | 40                              |

|                                              |                    |
|----------------------------------------------|--------------------|
| Minimum Buy Quantity                         | N/A                |
| Thread length $G_1$                          | 12 mm              |
| Basic dynamic load rating C                  | 11.9 kN            |
| Thread size attachment end G                 | M10                |
| Thread length - $G_1$                        | 12 mm              |
| Basic dynamic load rating - C                | 11.9 kN            |
| Bearing - YAR 205-100-2RFGR/HV               | YAR 2051002RFGR/HV |
| Thread grub screw $G_2$                      | 1/4-28 UNF         |
| Fatigue load limit $P_u$                     | 0.335 kN           |
| Calculation factor - $f_0$                   | 14                 |
| Fatigue load limit - $P_u$                   | 0.335 kN           |
| Hexagonal key size for grub screw N          | 3.175 mm           |
| Hexagonal key size for grub screw - H        | 3.175 mm           |
| Basic static load rating $C_0$               | 7.8 kN             |
| Basic static load rating - $C_0$             | 7.8 kN             |
| Recommended tightening torque for grub screw | 4 N·m              |