


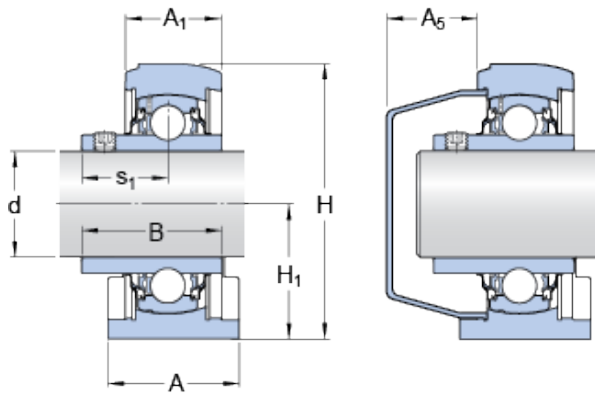

Bearing No. SYFWK 20 LTHR

|                     |                                 |
|---------------------|---------------------------------|
| J                   | 50.8 mm                         |
| B                   | 31 mm                           |
| L                   | 73 mm                           |
| H                   | 66 mm                           |
| d                   | 20 mm                           |
| A                   | 35 mm                           |
| Weight              | 0.26 kg                         |
| Housing             | SYFWK 504 L                     |
| Category            | Mounted Units & Inserts         |
| Inventory           | 0.0                             |
| Size (mm)           | 20x35x24                        |
| Width (mm)          | 24                              |
| A <sub>1</sub>      | 24 mm                           |
| H <sub>1</sub>      | 33.3 mm                         |
| H <sub>1</sub>      | 33.3 mm                         |
| s <sub>1</sub>      | 18.3 mm                         |
| A <sub>5</sub>      | 20.3 mm                         |
| A <sub>1</sub>      | 24 mm                           |
| Product Group       | M06110                          |
| s <sub>1</sub>      | 18.3 mm                         |
| Limiting speed      | 5000 r/min                      |
| Bearing number      | SYFWK 20 LTHR                   |
| Size thread - G     | M8                              |
| Housing material    | Composite for food and beverage |
| Mass bearing unit   | 0.26 kg                         |
| Manufacturer Name   | SKF                             |
| Weight / Kilogram   | 0                               |
| Bore Diameter (mm)  | 20                              |
| Outer Diameter (mm) | 35                              |

|                                                    |                 |
|----------------------------------------------------|-----------------|
| Minimum Buy Quantity                               | N/A             |
| Bearing - YAR<br>204-2RFGR/HV                      | YAR 2042RFGR/HV |
| Thread length $G_1$                                | 12 mm           |
| Basic dynamic load<br>rating C                     | 10.8 kN         |
| Thread size attachment<br>end G                    | M8              |
| Thread length - $G_1$                              | 12 mm           |
| Basic dynamic load<br>rating - C                   | 10.8 kN         |
| Thread grub screw $G_2$                            | M6x0.75         |
| Fatigue load limit $P_u$                           | 0.28 kN         |
| Calculation factor - $f_0$                         | 13              |
| Fatigue load limit - $P_u$                         | 0.28 kN         |
| Hexagonal key size for<br>grub screw N             | 3 mm            |
| Hexagonal key size for<br>grub screw - H           | 3 mm            |
| Basic static load rating<br>$C_0$                  | 6.55 kN         |
| Basic static load rating -<br>$C_0$                | 6.6 kN          |
| Recommended<br>tightening torque for<br>grub screw | 4 N·m           |