


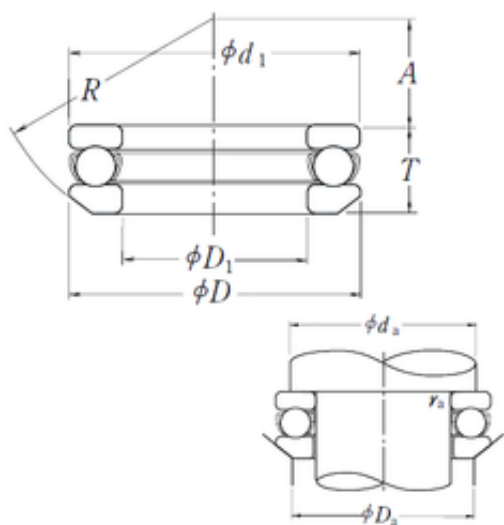

Bearing No. 53313

R	90 mm
C	123
r	1.1
d	65 mm
D	115 mm
T	39,4 mm
A	38,5 mm
R_	90
B_	39.4
ra	1
C0	282
da	95
Z_	15
A_	38.5
T3	39.4
d1	115 mm
D_	115
D1	67 mm
D_1	67
DA_	17.462
SRI	9.4
SRE	9.4
D_a	85
SREN	0
SRIN	0
yobi	53313
SRIX	0.065
mass	1.67
SDM_	90
KBRG	5121

SREX	0.065
Noun	Bearing
Weight	1,67 Kg
Bore 1	2.559 Inch 65 Millimeter
Banded	No
UNSPSC	31171552
r min.	1,1 mm
LangID	1
Height	1.535 Inch 39 Millimeter
Bore 2	2.638 Inch 67 Millimeter
GRS rpm	1500
hidYobi	53313
Oil rpm	2400
ra max.	1 mm
Da max.	85 mm
da min.	95 mm
Category	Thrust Ball Bearings
hidTable	ecat_NSSDTB
Size (mm)	65x115x39.4
Inventory	0.0
Prod_Type3	TB_SD_WAS
Width (mm)	39,4
Weight / LBS	3.68172
Product Group	B00308
Cage Material	Steel
Inch - Metric	Metric
Bearing number	53313
Other Features	Single Row With Aligning Seat
Thrust Bearing	Yes

Keyword String	Ball Thrust
Rolling Element	Ball Bearing
Precision Class	Non-Precision
Manufacturer URL	http://www.nskamericas.com
Long Description	65MM Bore 1; 67MM Bore 2; 115MM Outside Diameter; 39MM Height; Ball Bearing; Single Direction; Not Banded; Steel Cage; Non-Precision
Outside Diameter	4.528 Inch 115 Millimeter
Weight / Kilogram	1.95
Manufacturer Name	NSK
Bore Diameter (mm)	65
Outer Diameter (mm)	115
Minimum Buy Quantity	N/A
Component Description	Roller Assembly Plus Raceways
Harmonized Tariff Code	8482.10.50.08
(Grease) Lubrication Speed	1500 r/min
Single or Double Direction	Single Direction
Basic static load rating (C0)	282 kN
Basic dynamic load rating (C)	123 kN
Overall Height with Aligning Washer	0 Inch 0 Millimeter