


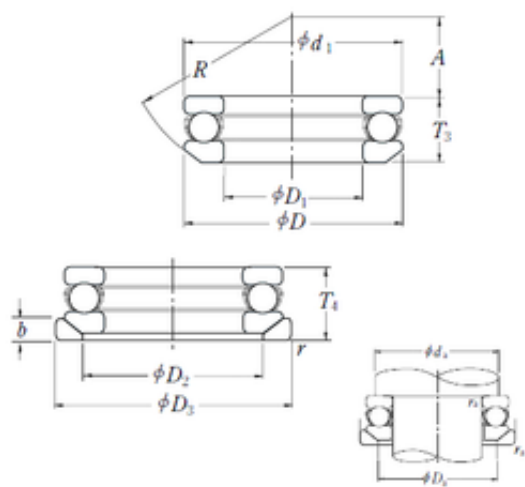

Bearing No. 53313U

C	123
D	115 mm
R	90 mm
A	38,5 mm
T	43 mm
b	12,5 mm
d	65 mm
r	1.1
A_	38.5
D_	115
Z_	15
da	95
T3	39.4
C0	282
T4	43
ra	1
B_	43
R_	90
D2	90 mm
D3	120 mm
D1	67 mm
d1	115 mm
D_2	90
D_3	120
SRE	9.4
D_1	67
SRI	9.4
DA_	17.462
D_a	85
SREX	0.065

SRIN	0
SREN	0
mass	2.04
yobi	53313U
SDM_	90
SRIX	0.065
KBRG	5131
r min.	1,1 mm
LangID	1
Weight	2,04 Kg
ra max.	1 mm
GRS rpm	1500
Oil rpm	2400
da min.	95 mm
Da max.	85 mm
hidYobi	53313U
hidTable	ecat_NSSDTB
Size (mm)	65x115x43
Prod_Type3	TB_SD_WASW
Width (mm)	43
Bearing number	53313U
Bore Diameter (mm)	65
Outer Diameter (mm)	115
(Grease) Lubrication Speed	1500 r/min
Basic static load rating (C0)	282 kN
Basic dynamic load rating (C)	123 kN