


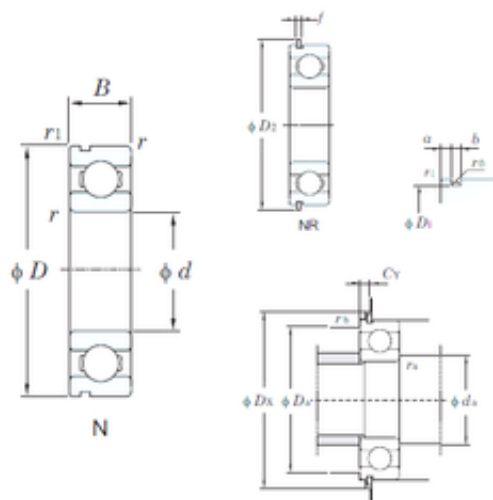

Bearing No. 6006NR

f	1,07 mm
d	30 mm
D	55 mm
B	13 mm
C	13 mm
a	2,08 mm
b	1,5 mm
Cr	16.5
f0	14.7
Cu	0.530
D2	60,7 mm
D1	52,6 mm
C0r	8.25
Bore	1.181 Inch 30 Millimeter
Noun	Bearing
r min.	1 mm
r(min)	1
UNSPSC	31171504
Weight	0,116 Kg
r1(min)	0.5
da(min)	35
D2(min)	60.7
Da(max)	50
rb(max)	0.5
ra(max)	1
Dx(min)	61.5
r0 max.	0,4 mm
r1 min.	0,5 mm
da min.	35 mm

Cy(max)	2.9
Da max.	50 mm
Category	Single Row Ball Bearing
Oil lub.	15000
Snap Ring	Yes
Size (mm)	30x55x13
Inventory	0.0
Enclosure	Open
Width (mm)	13
Grease lub.	13000
f{0.05)	1.07
Bearing No.	6006NR
Weight / LBS	0.25573
Cage Material	Steel
Inch - Metric	Metric
Product Group	B00308
Bearing number	6006NR
Other Features	Deep Groove With Snap Ring
Keyword String	Ball
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Manufacturer URL	http://www.koyousa.com
Inner Race Width	0 Inch 0 Millimeter
(Refer.)Mass(kg)	0.116
Long Description	30MM Bore; 55MM Outside Diameter; 13MM Outer Race Width; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; Yes Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage

Outer Race Width	0.512 Inch 13 Millimeter
Outside Diameter	2.165 Inch 55 Millimeter
Weight / Kilogram	0.125
Manufacturer Name	KOYO
Internal Clearance	C0-Medium
Bore Diameter (mm)	30
Outer Diameter (mm)	55
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
(Oil) Lubrication Speed	15000 r/min
Internal Special Features	No
(Grease) Lubrication Speed	13000 r/min
Basic static load rating (C0)	8,25 kN
Basic dynamic load rating (C)	13,2 kN
Maximum Capacity / Filling Slot	No