


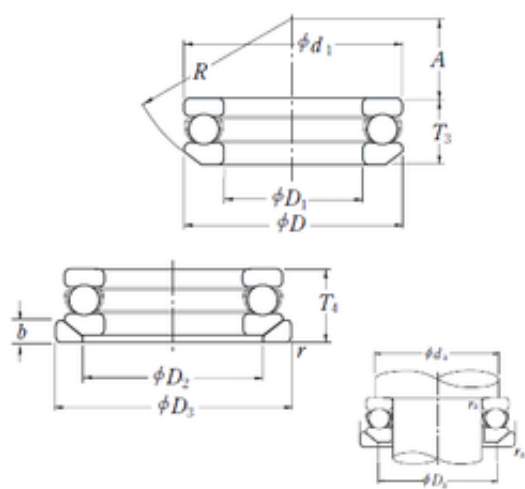

Bearing No. 53314U

C	137
D	125 mm
R	100 mm
A	43 mm
T	48 mm
b	13 mm
d	70 mm
r	1.1
A_	43
D_	125
Z_	14
da	103
T3	44.2
C0	315
T4	48
ra	1
B_	48
R_	100
D2	98 mm
D3	130 mm
D1	72 mm
d1	125 mm
D_2	98
D_3	130
SRE	10.3
D_1	72
SRI	10.3
DA_	19.05
D_a	92
SREX	0.08

SRIN	0
SREN	0
mass	2.64
yobi	53314U
SDM_	97.5
SRIX	0.08
KBRG	5131
r min.	1,1 mm
LangID	1
Weight	2,64 Kg
ra max.	1 mm
GRS rpm	1400
Oil rpm	2000
da min.	103 mm
Da max.	92 mm
hidYobi	53314U
hidTable	ecat_NSSDTB
Size (mm)	70x125x48
Prod_Type3	TB_SD_WASW
Width (mm)	48
Bearing number	53314U
Bore Diameter (mm)	70
Outer Diameter (mm)	125
(Grease) Lubrication Speed	1400 r/min
Basic static load rating (C0)	315 kN
Basic dynamic load rating (C)	137 kN