


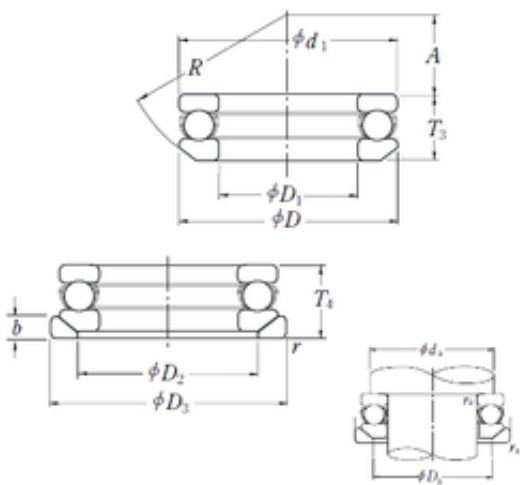

Bearing No. 53315U

C	159
D	135 mm
R	100 mm
A	37 mm
T	52 mm
b	15 mm
d	75 mm
r	1.5
A_	37
D_	135
Z_	14
da	111
T3	48.1
C0	365
T4	52
ra	1.5
B_	52
R_	100
D2	105 mm
D3	140 mm
D1	77 mm
d1	135 mm
D_2	105
D_3	140
SRE	11.15
D_1	77
SRI	11.15
DA_	20.638
D_a	99
SREX	0.08

SRIN	0
SREN	0
mass	3.42
yobi	53315U
SDM_	105
SRIX	0.08
KBRG	5131
r min.	1,5 mm
LangID	1
Weight	3,42 Kg
ra max.	1,5 mm
GRS rpm	1300
Oil rpm	1900
da min.	111 mm
Da max.	99 mm
hidYobi	53315U
hidTable	ecat_NSSDTB
Size (mm)	75x135x52
Prod_Type3	TB_SD_WASW
Width (mm)	52
Bearing number	53315U
Bore Diameter (mm)	75
Outer Diameter (mm)	135
(Grease) Lubrication Speed	1300 r/min
Basic static load rating (C0)	365 kN
Basic dynamic load rating (C)	159 kN