


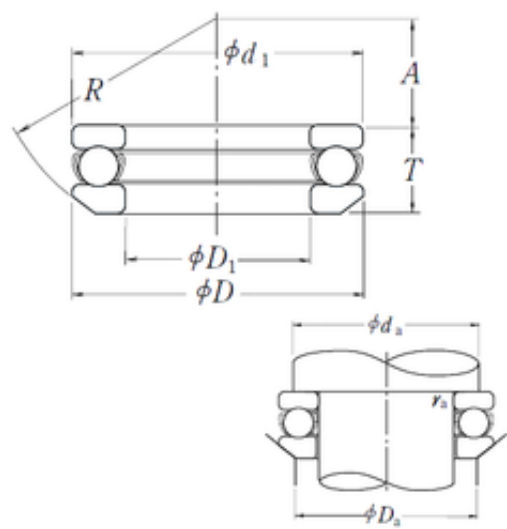

Bearing No. 53317

R	112 mm
C	207
r	1.5
d	85 mm
D	150 mm
T	53,1 mm
A	43 mm
R_	112
B_	53.1
ra	1.5
C0	490
da	124
Z_	14
A_	43
T3	53.1
d1	150 mm
D_	150
D1	88 mm
D_1	88
DA_	23.812
SRI	12.9
SRE	12.9
D_a	111
SREN	0
SRIN	0
yobi	53317
SRIX	0.08
mass	3.78
SDM_	117.5
KBRG	5121

SREX	0.08
Noun	Bearing
Bore 2	3.465 Inch 88 Millimeter
Bore 1	3.346 Inch 85 Millimeter
Banded	No
UNSPSC	31171552
r min.	1,5 mm
LangID	1
Weight	3,78 Kg
Height	2.087 Inch 53 Millimeter
GRS rpm	1100
hidYobi	53317
Oil rpm	1700
ra max.	1,5 mm
Da max.	111 mm
da min.	124 mm
Category	Thrust Ball Bearings
hidTable	ecat_NSSDTB
Size (mm)	85x150x53.1
Inventory	0.0
Prod_Type3	TB_SD_WAS
Width (mm)	53,1
Weight / LBS	8.33347
Product Group	B00308
Cage Material	Steel
Inch - Metric	Metric
Bearing number	53317
Other Features	Single Row With Aligning Seat
Thrust Bearing	Yes

Keyword String	Ball Thrust
Rolling Element	Ball Bearing
Precision Class	Non-Precision
Manufacturer URL	http://www.nskamericas.com
Long Description	85MM Bore 1; 88MM Bore 2; 150MM Outside Diameter; 53MM Height; Ball Bearing; Single Direction; Not Banded; Steel Cage; Non-Precision
Outside Diameter	5.906 Inch 150 Millimeter
Weight / Kilogram	4.44
Manufacturer Name	NSK
Bore Diameter (mm)	85
Outer Diameter (mm)	150
Minimum Buy Quantity	N/A
Component Description	Roller Assembly Plus Raceways
Harmonized Tariff Code	8482.10.50.08
(Grease) Lubrication Speed	1100 r/min
Single or Double Direction	Single Direction
Basic static load rating (C0)	490 kN
Basic dynamic load rating (C)	207 kN
Overall Height with Aligning Washer	0 Inch 0 Millimeter