


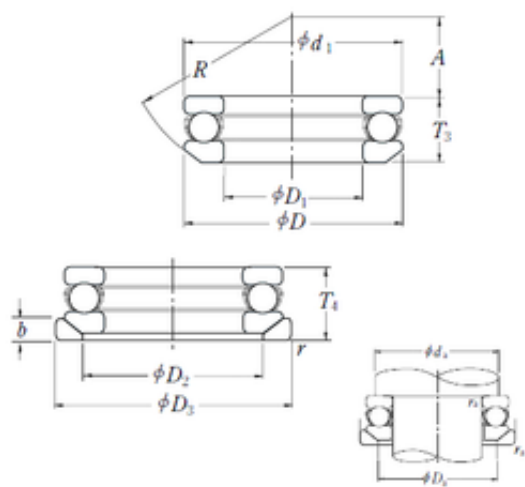

Bearing No. 53317U

C	207
D	150 mm
R	112 mm
A	43 mm
T	58 mm
b	17,5 mm
d	85 mm
r	1.5
A_	43
D_	150
Z_	14
da	124
T3	53.1
C0	490
T4	58
ra	1.5
B_	58
R_	112
D2	115 mm
D3	155 mm
D1	88 mm
d1	150 mm
D_2	115
D_3	155
SRE	12.9
D_1	88
SRI	12.9
DA_	23.812
D_a	111
SREX	0.08

SRIN	0
SREN	0
mass	4.67
yobi	53317U
SDM_	117.5
SRIX	0.08
KBRG	5131
r min.	1,5 mm
LangID	1
Weight	4,67 Kg
ra max.	1,5 mm
GRS rpm	1100
Oil rpm	1700
da min.	124 mm
Da max.	111 mm
hidYobi	53317U
hidTable	ecat_NSSDTB
Size (mm)	85x150x58
Prod_Type3	TB_SD_WASW
Width (mm)	58
Bearing number	53317U
Bore Diameter (mm)	85
Outer Diameter (mm)	150
(Grease) Lubrication Speed	1100 r/min
Basic static load rating (C0)	490 kN
Basic dynamic load rating (C)	207 kN