


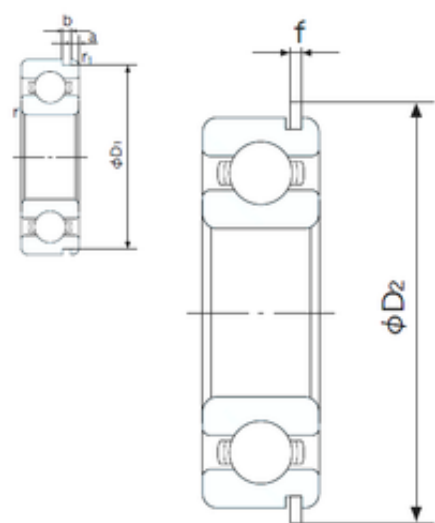

Bearing No. 6006NR

D	55 mm
d	30 mm
B	13 mm
C	13 mm
a	2.08 mm
b	1.35 mm
f	1.12 mm
D1	52.6 mm
r1	0.5 mm
D2	60.7 mm
Width	13 mm
UNSPSC	31171504
Weight	0.113 Kg
r min.	1 mm
r1 min.	0.5 mm
b (min)	1.4 mm
a (max)	2.1 mm
Da (max)	50 mm
da (min)	35 mm
Category	Ball Bearings
Dx (min)	61.5 mm
ra (max)	1 mm
D1 (max)	52.6 mm
Cy (max)	2.9 mm
Factor fo	14.8
Inventory	6.0
Size (mm)	30x55x13
Bore Type	Cylindrical Bore
Enclosure	Snap Ring Groove with Snap Ring

Bore Size	30 mm
Width (mm)	13
Product Group	B00308
Configuration	Single Row
Bearing number	6006NR
Snap Ring Width	1.1 mm
Radial Clearance	0.005 to 0.020 mm
Outside Diameter	55 mm
Weight / Kilogram	0.118
Manufacturer Name	NACHI
Bore Diameter (mm)	30
Static Load Rating	8,300 N
Dynamic Load Rating	13,200 N
Outer Diameter (mm)	55
Minimum Buy Quantity	N/A
Limiting Speed - Oil	15,000 rpm
Fillet Radius/Chamfer	1 mm
Limiting Speed - Grease	13,000 rpm
(Grease) Lubrication Speed	12000 r/min
Snap Ring Outside Diameter	60.7 mm
Basic static load rating (C0)	8,3 kN
Basic dynamic load rating (C)	13,2 kN