


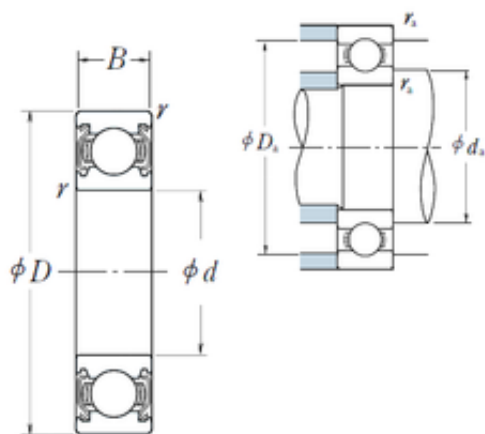

Bearing No. 6006ZZ

r	1
d	30 mm
D	55 mm
B	13 mm
C	13 mm
D_	55
Z_	11
B_	13
ra	1
fo	14.7
C0	8.3
DI_	35.556
DE_	49.844
DA_	7.144
D_a	50
SRE	3.79
SRI	3.61
SRIN	0
Noun	Bearing
bomp	0
Bore	1.181 Inch 30 Millimeter
SREN	0
mass	0.116
SRIX	0.02
SREX	0.04
SBRG	10
yobi	6006ZZ
KBRG	6141
SDM_	42.7

ALPHA_	0
da min	35
C_conv	13200
LangID	1
da max	36,5 mm
UNSPSC	31171504
r min.	1 mm
Weight	0,116 Kg
da min.	35 mm
GRS rpm	13000
Da max.	50 mm
ra max.	1 mm
hidYobi	6006ZZ
hidTable	ecat_NSRDGB
Category	Single Row Ball Bearing
Enclosure	2 Metal Shields
Snap Ring	No
Inventory	0.0
Size (mm)	30x55x13
Width (mm)	13
bore type:	Round
Prod_Type3	DGBB_SR_ZZ
Weight / LBS	0.115
closure type:	Double Shielded
Product Group	B00308
Inch - Metric	Metric
Cage Material	Steel
Bearing number	6006ZZ
Keyword String	Ball
bore diameter:	30 mm
overall width:	13 mm
Rolling Element	Ball Bearing

Precision Class	ABEC 1 ISO P0
Outer Race Width	0.512 Inch 13 Millimeter
Outside Diameter	2.165 Inch 55 Millimeter
Manufacturer URL	http://www.nskamericas.com
Long Description	30MM Bore; 55MM Outside Diameter; 13MM Outer Race Diameter; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Weight / Kilogram	0.05
outside diameter:	55 mm
Manufacturer Name	NSK
Bore Diameter (mm)	30
Internal Clearance	C0-Medium
internal clearance:	Normal Clearance
Outer Diameter (mm)	55
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
manufacturer upc number:	029176012723
Manufacturer Item Number	6006ZZ
Internal Special Features	No
(Grease) Lubrication Speed	13 000 r/min
Basic static load rating (C0)	8,3 kN
Basic dynamic load rating (C)	13,2 kN

Maximum Capacity / Filling Slot	No
------------------------------------	----