


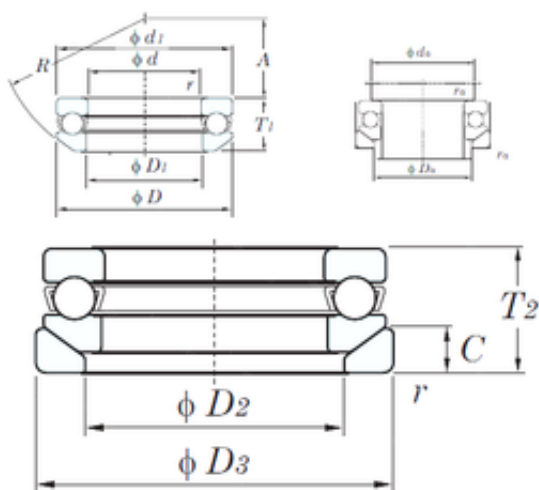

Bearing No. 53416U

|           |             |
|-----------|-------------|
| R         | 125 mm      |
| T         | 78          |
| d         | 80 mm       |
| D         | 170 mm      |
| A         | 36 mm       |
| C         | 22 mm       |
| Cu        | 25.1        |
| Ca        | 337         |
| T1        | 72,2 mm     |
| T2        | 78 mm       |
| d1        | 170 mm      |
| D1        | 83 mm       |
| D2        | 125 mm      |
| D3        | 175 mm      |
| Coa       | 621         |
| r(min)    | 2.1         |
| Weight    | 9,22 Kg     |
| r min.    | 2,1 mm      |
| da min.   | 133 mm      |
| Da max.   | 117 mm      |
| ra max.   | 2 mm        |
| da(min)   | 133         |
| D3(min)   | 175         |
| D2(min)   | 125         |
| D1(min)   | 83          |
| Da(max)   | 117         |
| ra(max)   | 2           |
| d1(max)   | 170         |
| Oil lub.  | 1250        |
| Size (mm) | 80x170x72.2 |
|           |             |

|                               |           |
|-------------------------------|-----------|
| Width (mm)                    | 72,2      |
| Bearing No.                   | 53416U    |
| Grease lub.                   | 810       |
| Bearing number                | 53416U    |
| (Refer.)Mass(kg)              | 9.22      |
| Bore Diameter (mm)            | 80        |
| Outer Diameter (mm)           | 170       |
| (Grease) Lubrication Speed    | 810 r/min |
| Basic static load rating (C0) | 621 kN    |
| Basic dynamic load rating (C) | 270 kN    |