


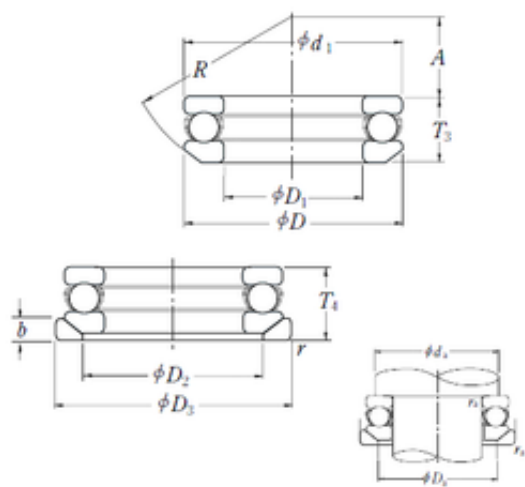

Bearing No. 53416U

C	272
D	170 mm
R	125 mm
A	36 mm
T	78 mm
b	22 mm
d	80 mm
r	2.1
A_	36
D_	170
Z_	10
da	133
T3	72.2
C0	620
T4	78
ra	2
B_	78
R_	125
D2	125 mm
D3	175 mm
D1	83 mm
d1	170 mm
D_2	125
D_3	175
SRE	17.15
D_1	83
SRI	17.15
DA_	31.75
D_a	117
SREX	0.125

SRIN	0
SREN	0
mass	8.9
yobi	53416U
SDM_	125
SRIX	0.125
KBRG	5131
r min.	2,1 mm
LangID	1
Weight	8,9 Kg
ra max.	2 mm
GRS rpm	900
Oil rpm	1300
da min.	133 mm
Da max.	117 mm
hidYobi	53416U
hidTable	ecat_NSSDTB
Size (mm)	80x170x78
Prod_Type3	TB_SD_WASW
Width (mm)	78
Bearing number	53416U
Bore Diameter (mm)	80
Outer Diameter (mm)	170
(Grease) Lubrication Speed	900 r/min
Basic static load rating (C0)	620 kN
Basic dynamic load rating (C)	272 kN