


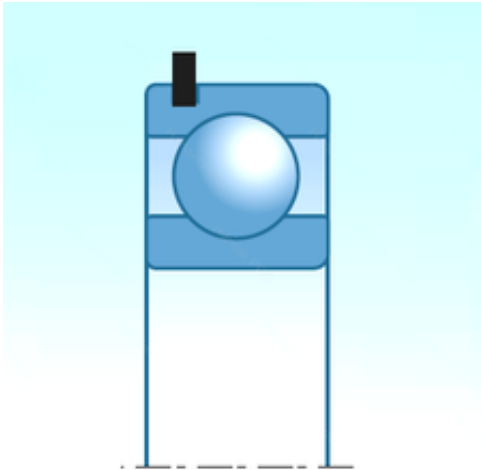

Bearing No. 6006ZZNR

C	13,000 mm
d	30,000 mm
B	13,000 mm
D	55,000 mm
Noun	Bearing
Bore	1.181 Inch 30 Millimeter
UNSPSC	31171504
series:	60
Category	Single Row Ball Bearing
Size (mm)	30x55x13
Enclosure	2 Metal Shields
Snap Ring	Yes
Inventory	0.0
Width (mm)	13,000
bore type:	Round
maximum rpm:	15000 RPM
Weight / LBS	0.25
Cage Material	Steel
closure type:	Double Shielded
Product Group	B00308
Inch - Metric	Metric
Bearing number	6006ZZNR
bore diameter:	30 mm
overall width:	13 mm
fillet radius:	1 mm
cage material:	Steel
Keyword String	Ball
Other Features	Deep Groove With Snap Ring Shell Alvania Prelubricated

Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
finish/coating:	Uncoated
Long Description	30MM Bore; 55MM Outside Diameter; 13MM Outer Race Width; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; Yes Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Ste
Manufacturer URL	http://www.ntnamerica.com
Inner Race Width	0 Inch 0 Millimeter
Outside Diameter	2.165 Inch 55 Millimeter
Outer Race Width	0.512 Inch 13 Millimeter
Weight / Kilogram	0
Manufacturer Name	NTN
outer ring width:	13 mm
precision rating:	ISO Class 0
outside diameter:	55 mm
inner ring width:	13 mm
bearing material:	High Carbon Chrome Steel
Bore Diameter (mm)	30,000
Internal Clearance	C0-Medium
Outer Diameter (mm)	55,000
snap ring included:	With Snap Ring
internal clearance:	CN
Minimum Buy Quantity	N/A
row type & fill slot:	Single Row Non-Fill Slot
static load capacity:	8300 N

maximum rpm (grease):	13000 rpm
dynamic load capacity:	13200 N
Harmonized Tariff Code	8482.10.50.68
Internal Special Features	No
manufacturer product page:	Click here
operating temperature range:	-40 to 120 °C
Maximum Capacity / Filling Slot	No