


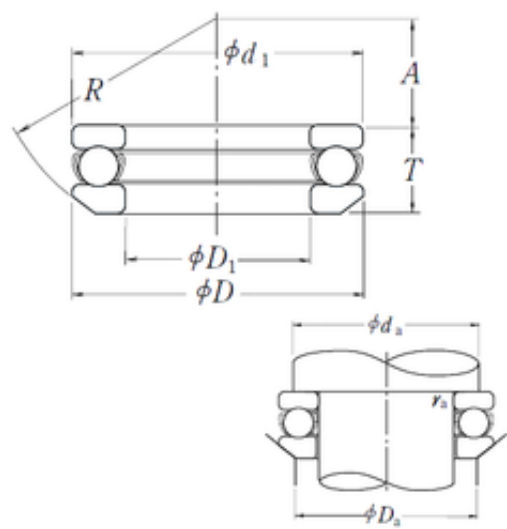

Bearing No. 53318

R	112 mm
C	214
r	1.5
d	90 mm
D	155 mm
T	54,6 mm
A	40 mm
R_	112
B_	54.6
ra	1.5
C0	525
da	129
Z_	15
A_	40
T3	54.6
d1	155 mm
D_	155
D1	93 mm
D_1	93
DA_	23.812
SRI	12.9
SRE	12.9
D_a	116
SREN	0
SRIN	0
yobi	53318
SRIX	0.08
mass	4.11
SDM_	122.5
KBRG	5121

SREX	0.08
Noun	Bearing
Weight	4,11 Kg
Height	2.165 Inch 55 Millimeter
Banded	No
UNSPSC	31171552
r min.	1,5 mm
LangID	1
Bore 1	3.543 Inch 90 Millimeter
Bore 2	3.661 Inch 93 Millimeter
GRS rpm	1100
hidYobi	53318
Oil rpm	1700
ra max.	1,5 mm
Da max.	116 mm
da min.	129 mm
Category	Thrust Ball Bearings
hidTable	ecat_NSSDTB
Size (mm)	90x155x54.6
Inventory	0.0
Prod_Type3	TB_SD_WAS
Width (mm)	54,6
Weight / LBS	9.061
Product Group	B00308
Cage Material	Steel
Inch - Metric	Metric
Bearing number	53318
Other Features	Single Row With Aligning Seat
Thrust Bearing	Yes

Keyword String	Ball Thrust
Rolling Element	Ball Bearing
Precision Class	Non-Precision
Manufacturer URL	http://www.nskamericas.com
Long Description	90MM Bore 1; 93MM Bore 2; 155MM Outside Diameter; 55MM Height; Ball Bearing; Single Direction; Not Banded; Steel Cage; Non-Precision
Outside Diameter	6.102 Inch 155 Millimeter
Weight / Kilogram	4.71
Manufacturer Name	NSK
Bore Diameter (mm)	90
Outer Diameter (mm)	155
Minimum Buy Quantity	N/A
Component Description	Roller Assembly Plus Raceways
Harmonized Tariff Code	8482.10.50.08
(Grease) Lubrication Speed	1100 r/min
Single or Double Direction	Single Direction
Basic static load rating (C0)	525 kN
Basic dynamic load rating (C)	214 kN
Overall Height with Aligning Washer	0 Inch 0 Millimeter