


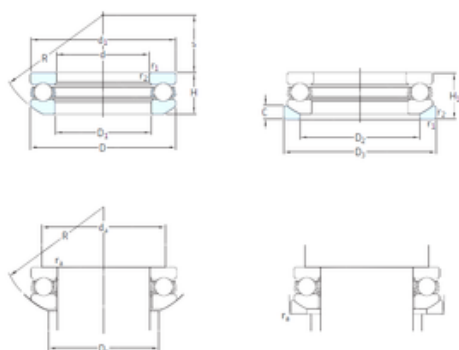

**Bearing No. 53318+U318**

|                               |             |
|-------------------------------|-------------|
| C                             | 18 mm       |
| R                             | 112 mm      |
| d                             | 90 mm       |
| D                             | 155 mm      |
| H                             | 54,6 mm     |
| s                             | 40 mm       |
| D1                            | 93 mm       |
| H1                            | 59 mm       |
| d1                            | 155 mm      |
| D3                            | 160 mm      |
| D2                            | 120 mm      |
| Weight                        | 4,7 Kg      |
| r1 min.                       | 1,5 mm      |
| r2 min.                       | 1,5 mm      |
| Da max.                       | 120 mm      |
| rb max.                       | 1 mm        |
| da min.                       | 129 mm      |
| Size (mm)                     | 90x155x54.6 |
| Width (mm)                    | 54,6        |
| Bearing number                | 53318+U318  |
| Limiting speed                | 2000 r/min  |
| Reference speed               | 1400 r/min  |
| Bore Diameter (mm)            | 90          |
| Outer Diameter (mm)           | 155         |
| Fatigue load limit (Pu)       | 14,6        |
| Basic dynamic load rating (C) | 182 kN      |
| Basic static load rating (C0) | 440 kN      |