


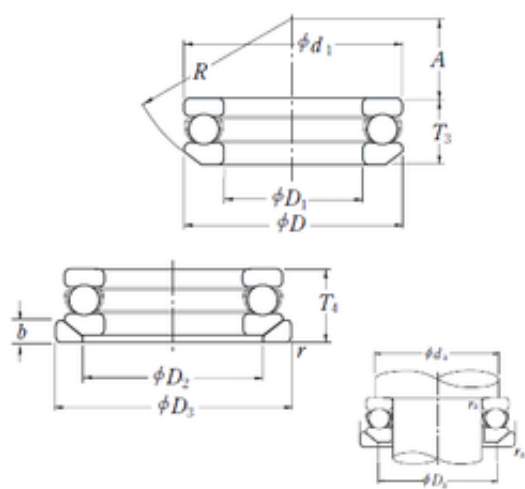

Bearing No. 53318U

C	214
D	155 mm
R	112 mm
A	40 mm
T	59 mm
b	18 mm
d	90 mm
r	1.5
A_	40
D_	155
Z_	15
da	129
T3	54.6
C0	525
T4	59
ra	1.5
B_	59
R_	112
D2	120 mm
D3	160 mm
D1	93 mm
d1	155 mm
D_2	120
D_3	160
SRE	12.9
D_1	93
SRI	12.9
DA_	23.812
D_a	116
SREX	0.08

SRIN	0
SREN	0
mass	5.09
yobi	53318U
SDM_	122.5
SRIX	0.08
KBRG	5131
r min.	1,5 mm
LangID	1
Weight	5,09 Kg
ra max.	1,5 mm
GRS rpm	1100
Oil rpm	1700
da min.	129 mm
Da max.	116 mm
hidYobi	53318U
hidTable	ecat_NSSDTB
Size (mm)	90x155x59
Prod_Type3	TB_SD_WASW
Width (mm)	59
Bearing number	53318U
Bore Diameter (mm)	90
Outer Diameter (mm)	155
(Grease) Lubrication Speed	1100 r/min
Basic static load rating (C0)	525 kN
Basic dynamic load rating (C)	214 kN