


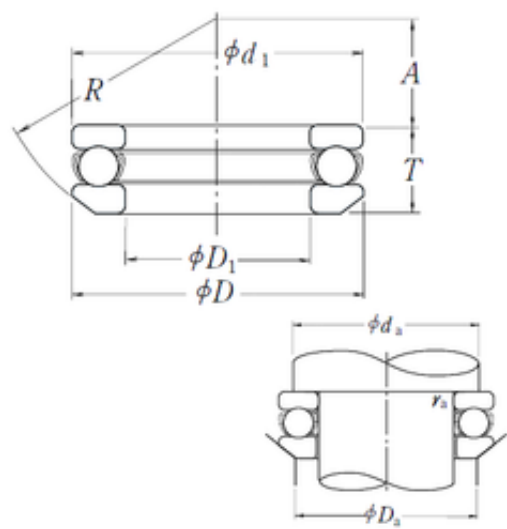

Bearing No. 53322X

C	282
r	2
d	110 mm
D	190 mm
T	67,2 mm
A	51 mm
R	140 mm
D_	190
T3	67.2
A_	51
Z_	15
da	158
C0	755
ra	2
B_	67.2
R_	140
D1	113 mm
d1	187 mm
D_a	142
SRI	15.43
DA_	28.575
D_1	113
SRE	15.43
SRIX	0.1
KBRG	5121
SDM_	150
yobi	53322X
SREX	0.1
SREN	0
mass	7.55

SRIN	0
r min.	2 mm
Weight	7,55 Kg
LangID	1
ra max.	2 mm
GRS rpm	900
Oil rpm	1300
Da max.	142 mm
da min.	158 mm
hidYobi	53322X
hidTable	ecat_NSSDTB
Size (mm)	110x190x67.2
Width (mm)	67,2
Prod_Type3	TB_SD_WAS
Bearing number	53322X
Bore Diameter (mm)	110
Outer Diameter (mm)	190
(Grease) Lubrication Speed	900 r/min
Basic static load rating (C0)	755 kN
Basic dynamic load rating (C)	282 kN